



# Full Line Catalog



Stepladders

Extension Ladders

Scaffolds & Work Platforms

Attic Stairways

Articulating Ladders

Specialty Ladders

Platform Ladders & Step Stools

Planks, Decks & Accessories



# TABLE OF CONTENTS

STEPLADDERS	MODEL	TYPE	PAGE	TRESTLE (CONT.)	MODEL	TYPE	PAGE
<b>FIBERGLASS</b>				<b>ALUMINUM</b>			
• Rhino 375™ Stepladder	FS1100HD	IAA	6	• Extension Trestle	AX1000	IA	21
• Brute™ 375 Stepladder	FS1400HD	IAA	6	<b>EXTENSION LADDERS</b>			
• Stepladder	FS1500	IA	7	<b>FIBERGLASS</b>			
• Stepladder	FS2000	I	7	• Rhino 375™ Extension Ladder	FE4000HD	IAA	12
• Step Stand	FY8000	IA	15	• Plate Connect Extension & Single	FE7000	IA	13
<b>ALUMINUM</b>				• Extension Ladder	FE3200	IA	13
• Rhino 375™ Stepladder	AS1100HD	IAA	16	• Extension Ladder	FE1700	I	14
• Stepladder	AS1000	IA	16	• Manhole Ladder	FE8800	IA	14
• Stepladder	AS3000	IA	17	<b>ALUMINUM</b>			
• Stepladder	AS2100	I	17	• Rhino 375™ Extension Ladder	AE1200HD	IAA	23
• Stepladder	AS4000	II	18	• Stacked Extension Ladder	AE2800	IA	23
• Step Stand	AY8000	IA	15	• Extension Ladder	AE2000	IA	24
<b>WOOD</b>				• Extension Ladder	AE3000	I	24
• Stepladder	WS1000M	IA	26	• Extension Ladder – 3 Section	AE1660	I	25
• Stepladder	WS3600M	I	26	• Extension Ladder	AE4000	II	25
<b>TWIN FRONT LADDERS</b>				<b>WOOD</b>			
<b>FIBERGLASS</b>				• Extension Ladder	WE1800M	IA	27
• Brute™ 375 Twin Front Ladder	FM1400HD	IAA	8	<b>ATTIC LADDERS</b>			
• Twin Front Ladder	FM1500	IA	8	<b>ALUMINUM</b>			
• Twin Front Ladder	FM2000	I	9	• Summit Series	–	–	29
<b>ALUMINUM</b>				• Everest Series	–	–	29
• Rhino 375™ Twin Front Ladder	AM1100HD	IAA	18	<b>WOOD</b>			
• Twin Front Ladder	AM1000	IA	19	• Premium Series	–	–	27
<b>PLATFORM LADDERS</b>				• Big Boy Series	–	–	28
<b>FIBERGLASS</b>				• Champion Series	–	–	28
• Brute™ 375 Platform Ladder	FP1400HD	IAA	10	<b>WORK &amp; WAREHOUSE PLATFORMS</b>			
• Platform Ladder	FP1500	IA	10	<b>FIBERGLASS</b>			
<b>ALUMINUM</b>				• Mobile Maintenance Platform	FW Series	IA	34
• Platform Ladder	AP11000HD	IAA	19	<b>STEEL</b>			
• Platform Ladder	AP1000	IA	20	• Dry Wall Cart	DC Series	–	30
• Mobile Platform Ladder	AP5000	IA	20	• Mini Fortruss® Mobile Work Stand	SM Series	–	30
<b>SPECIAL DUTY LADDERS</b>				• Fortruss® Rolling Tower Scaffolds	SS Series	–	31
<b>FIBERGLASS</b>				• Rolling Warehouse Ladders	GSW Series	–	32
• Step-To-Straight	FC1200	IAA	11	• HD Rolling Warehouse Ladders	GSX2400 Series	–	33
• Tripod Ladder	FT1000	IA	9	• HD Rolling Warehouse Ladders	GSX1600 Series	–	33
• Shelf Ladder	FH1000	IA	12	<b>STAGES</b>			
• The Ultimate™ Articulated Ladder	L-3092	IA	15	• Scaf-A-Deck	PD	–	35
<b>ALUMINUM</b>				• Telescoping Plank	LP-2920	–	35
• Shelf Ladder	AH1000	IA	21	• Scaffold Planks & Stages	P1/P2/P3	–	36–38
• Aircraft Deicing Inspection Ladder	AH8000	IA	22	<b>REPLACEMENT PARTS</b>			
• Aircraft Mechanic Ladder	AM8000	IA	22	–	–	–	39
• The Ultimate™ Articulated Ladder	L-2091	I & IA	15	<b>LADDER ACCESSORIES</b>			
• Multi-Purpose Ladder		IA	42	–	–	–	40–41
<b>STEEL</b>				LOGOLOCK™	–	–	42
• The Ultimate™ Articulated Ladder	L-4191	I	15	<b>C.I.I.M.B. ACADEMY® PROGRAM</b>			
<b>TRESTLE LADDERS</b>				–	–	–	43
<b>FIBERGLASS</b>				<b>SRA7 LADDER RACK MERCHANDISER</b>			
• Extension Trestle	FX1100	IA	11	–	–	–	43

# The Industry's Leader In Product Innovation



Founded in 1946, Louisville Ladder, Inc. is the second largest manufacturer of ladders in North America. Louisville Ladder, Inc. uses its leadership position to promote higher industry standards and innovative consumer education about using ladders safely.

Headquartered in Louisville, KY, Louisville Ladder, Inc. is owned by Grupo IMSA. Louisville Ladder, Inc. is the culmination of several ladder manufacturers — Louisville, Davidson and Cuprum.

With a plant in Mexico, the U.S. network has warehouses in Atlanta, Chicago, Dallas, Houston, Kansas City, Los Angeles, Philadelphia and San Francisco. Its Canadian warehouses are located in Langley, British Columbia, Mississauga, Ontario, and Ville St. Laurent, Quebec.

The history of Louisville Ladder shows the innovations the company has brought to the industry:

- |      |  |
|------|--|
| 1946 | ■ First aluminum step and extension ladder.  |
| 1952 | ■ Revolutionary aluminum step and extension ladder construction, with steps using a channel that had the steps riveted directly to the rail flange; and with extensions using a patented rung-to-rail connection.  |
| 1959 | ■ Knocked-down steel rolling warehouse ladder.   |
| 1961 | ■ First line of fiberglass ladders, including an extension ladder using the patented rung-to-rail connection with aluminum washers on both sides of the rail.  |
| 1981 | ■ First structural foam-molded stepladder top.   |
| 1989 | ■ First powder-coat paint on the steel product line.   |
| 1992 | ■ Patented steel rolling tower that could be set up by one person.   |
| 1997 | ■ Patented Quicklatch® on rung locks.  |
| 1997 | ■ The only fiberglass mobile work platform.  |
| 1998 | ■ Full Metal Boot™ wrap-around shoe assembly for stepladders.  |
| 1999 | ■ RHINO™ 375 Series, the first ladder with a 375-pound weight capacity.  |
| 2002 | ■ DaBoot™ is a polypropylene copolymer upper boot that provides strength, durability and fiberglass rail surface protections. Thick non-marring tread is bonded and mechanically fastened to the upper boot and provides a slip resistant footing. Inside, DaBoot™ has a unique open design that allows for quick and easy visual inspection of the fiberglass rail. |



# LADDER SAFETY STANDARDS

## We make safe ladders...

All Louisville Ladder products have been designed and built to meet or exceed the application standards and requirements of the American National Standards Institute (ANSI), Occupational Safety and Health Administration (OSHA), and Canadian Standards Association (CSA).



OSHA sets minimum national requirements with respect to the use of ladders in business and industry. However, many states have enacted their own regulations under the Occupational Safety & Health Act that establish more severe requirements. The more demanding state codes will supersede OSHA standards within their respective states. Therefore users should check with their own state OSHA representatives.

The adequacy of ladders and the work practices followed by employees using them are regulated by OSHA in four sections: Portable Wood (1910.25), Portable Metal (1910.26), Fixed Ladders (1910.27), Mobile Ladder Stands and Scaffolds (1910.29) and ladders used in Construction Industry (1926.1053). These sections specify the standards to which all portable ladders must be manufactured, care and placement of ladders in the workplace and the safe use of ladders on the job.



Louisville Ladder, Inc. manufactures products in compliance with the applicable safety codes of the American National Standards Institute (ANSI).

There are a variety of ANSI safety codes depending on material and type of ladder. The applicable ANSI codes are as follows:

WOOD LADDER	ANSI A14.1	STEEL LADDER	ANSI A14.7	SPECIAL DUTY LADDER	ANSI A14.10	METAL LADDER	ANSI A14.2
FIBERGLASS LADDER	ANSI A14.5	STAGE PLATFORM	ANSI A10.8	ROLLING SCAFFOLD	ANSI A10.8	ATTIC LADDER	ANSI A14.9

In addition, ANSI codes have established a Duty Rating which identifies the use for which a portable ladder is intended and the conditions under which the ladder can be used safely. The following table describes the various types of ladders:

	<b>TYPE IAA</b> Extra heavy duty industrial capable of supporting 375 lbs.		<b>TYPE IA</b> Extra heavy duty industrial capable of supporting 300 lbs.		<b>TYPE I</b> Heavy duty industrial capable of supporting 250 lbs.		<b>TYPE II</b> Medium duty commercial capable of supporting 225 lbs.		<b>TYPE III</b> Light duty household capable of supporting 200 lbs.
---	---	--	--	--	---	---	---	--	--


An extensive series of tests and design requirements determines which Duty Rating label a particular ladder may receive. The total load supported includes the combined weight of the user, clothing, tools and any materials on the ladder. However, ladders must be used properly in order to support the intended load.



Product meets or exceeds Canadian Standards Association testing requirements.

## ...but you make ladders safe.

Even a rigidly constructed ladder can be involved in an accident if the proper cautions are not taken in its use. Critical factors in safe use include reading all instructions and labels accompanying the ladder.



**DANGER**  
Metal ladders conduct electricity; do not use where contact may be made with live electrical circuits. Failure to read and follow instructions on the use of this product could result in serious personal injury or death.

### Proper Selection

Select ladder of proper duty rating to support combined weight of user and materials. Ladders are available with duty ratings of 200, 225, 250, 300 and 375 lbs. Select ladder of proper length to safely reach desired height.

### Inspection Before Each Use

- Inspect thoroughly for missing or damaged components. Never use a damaged ladder and never make temporary repairs.
- Inspect thoroughly for loose fasteners. Make sure all working parts are in good working order (lubricate if necessary).
- Clean ladder of all foreign material (wet paint, mud, snow, grease, oil, etc).
- Destroy ladder if damaged, worn, or exposed to fire or chemicals.

### Consider Before Each Use

- Metal ladders conduct electricity. Keep away from electrical circuits.

- Consult manufacturer for use in chemical or other corrosive environments.
- Use ladder only as outlined in instructions. Ladders are designed for one person only. Do not overload.
- Do not use in high winds or during storm.
- Do not use if in poor health, if taking any drugs or alcoholic beverages, or if physically handicapped.
- Keep shoes clean. Leather soles should not be worn.
- Never leave ladder set up and unattended.
- Pay close attention to what you are doing.

### STEPLADDERS

#### Proper Set Up and Use

- Use help in setting up ladder, if possible.
- Make sure ladder is fully open and spreaders locked.
- Set all feet on firm, level surface. Do not place on unstable, loose, or slippery surfaces. Place ladder where access is not obstructed. Do not place in front of unlocked doors. Ladders are not intended to be used on scaffolds.
- Secure ladder from movement where possible.

- Make sure spreaders are locked and ladder is stable before climbing.
- Climb only front side of ladder. Face ladder when climbing up or down. Maintain a firm grip. Use both hands in climbing.
- Keep body centered between side rails. Do not overreach. Get down and move ladder as needed.
- Do not climb, stand, or sit above second step from top. Do not climb, stand, or sit on spreader braces, ladder top, or pail shelf.
- Do not straddle front and back. Do not climb from one ladder onto another.
- Avoid pushing or pulling off to side of ladder. Do not “walk” or “shift” ladder while on it.

FOR ADDITIONAL INFORMATION SEE ANSI A14.1-WOOD:

A14.2-ALUMINUM: A14.5-FIBERGLASS.

Mechanic ladders and extension trestle ladders may be climbed from either side.

### SINGLE & EXTENSION LADDERS

#### Proper Set Up and Use

- Use help in setting up ladder, if possible.
- Set base of ladder on firm, level surface. Ladder leveling devices are available for use on uneven ground. Place ladder where access is not obstructed.
- Do not place on unstable, loose, or slippery surfaces. Do not place in front of unlocked doors. Ladders are not intended to be used on scaffolds.
- Secure base section before raising ladder to upright position. Do not raise or lower with fly section extended.
- Extend fly section and engage rung locks. Make sure rope does not create a tripping hazard or interfere with activity near ladder. Recommend tying bottom fly rung to adjacent base rung.
- Extend and retract fly section only from ground and when no one is on ladder.
- Do not overextend. A minimum overlap of sections is required as follows:
  - ladder size up to and including 32' -3' overlap
  - over 32' up to and including 36' -4' overlap


- over 36' up to and including 48' -5' overlap
- sizes over 48' -6' overlap

- Position ladder against upper support surface. Make sure ladder does not lean to side. Ladder must make a 75-1/2° angle with the ground.
- To establish if ladder is at proper angle – Determine the distance along the rail between the top and bottom support points of the ladder. Divide this distance by 4. The result will be the horizontal distance between the top and bottom support points.
- Erect ladder with approximately 3 feet extending above roof line or working surface.
- Secure top and bottom of ladder from movement where possible.
- Check that top and bottom of ladder are properly supported. Make sure rung locks are engaged before climbing.
- Face ladder when climbing up or down. Maintain a firm grip.
- Use both hands in climbing.
- Keep body centered between side rails. Do not overreach. Get down and move ladder as needed.
- Do not climb above top support point. Do not climb from one ladder to another.
- Do not straddle or sit on rungs.
- Avoid pushing or pulling off to side of ladder. Do not “walk” or “shift” ladder while on it.

#### Proper Care and Storage

- Hang ladder on racks at intervals of 6' for support.
- Never store materials on ladder.
- Never drop or apply an impact load to ladder.
- Securely support ladder in transit.
- Never paint a wood ladder. Treat with wood preservative.
- Protect wood ladder from exposure to the elements, but allow good ventilation. Keep away from heat and moisture.

### USE THESE CHARTS TO DETERMINE THE RIGHT LADDER LENGTH FOR YOUR JOB:

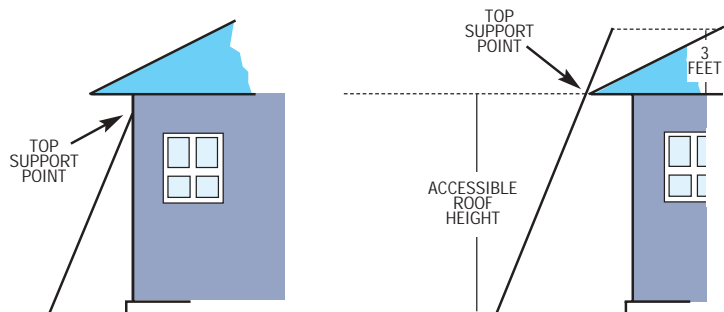

STEPLADDER HEIGHT SELECTION GUIDE		EXTENSION LADDER LENGTH SELECTION GUIDE			
STEPLADDER SIZE	APPROX. HIGHEST STANDING LEVEL	LADDER SIZE	MAXIMUM EXTENDED LENGTH	*WORKING RANGE TO TOP SUPPORT	*MAXIMUM ACCESSIBLE ROOF HEIGHT RANGE
4'	1' 11"	16'	13'	7-1/2'-12-1/2'	4-1/2'-9-1/2'
5'	2' 10"	20'	17'	9-1/2'-16-1/2'	6-1/2'-13-1/2'
6'	3' 9"	24'	21'	11-1/2'-20'	8-1/2'-17'
7'	4' 9"	28'	25'	13-1/2'-24'	10-1/2'-21'
8'	5' 8"	32'	29'	15-1/2'-28'	12-1/2'-25'
10'	7' 7"	36'	32'	17-1/2'-31'	14'-28'
12'	9' 6"	40'	35'	19'-33-1/2'	16'-30-1/2'
14'	11' 5"	44'	39'	21'-37-1/2'	18'-34-1/2'
16'	13' 4"	48'	43'	23'-41-1/2'	20'-38-1/2'
18'	15' 3"	60' <sup>(1)</sup>	48'	23'-46-1/2'	20'-43-1/2'
20'	17' 2"				

\*When set up at the proper 75-1/2° angle

<sup>(1)</sup> Three-section extension


**375 lbs.**  
TYPE IAA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS STEPLADDER

FS1100HD SERIES



FEATURING THE EXCLUSIVE  
**FULL METAL BOOT™**




### Full Metal Boot™

Aluminum angle feet with thick slip resistant rubber tread. Reinforcement plates wrap around the rail for unsurpassed durability.




### Molded Top With Recessed Tray

Nonconductive structural molded top provides greater impact resistance and durability than aluminum tops. Large parts tray recessed 1/4" deep with tool slots.



### Extra Heavy Duty Inside Spreader Braces

Extra thick spreader braces located inside of fiberglass rails help protect braces from getting hooked or abused in transit.




### Double-Rivet Step Construction

Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.




### Heavy Duty Reinforcement Plates

Reinforcement plates wrap around the rail at spreader brace for unsurpassed durability.



### 375 lb. Rated Yellow Rail

Nonconductive full channel rails are covered with a polyester veil for years of service without fiber prominence or blooming.



### Heavy Double Gusset Bracing

Heavy duty steel gussets on each step and angle back brace.

MODEL	STEP SIZE	BOTTOM SIZE	APPROX. WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FS1104HD	4'	3"	20 1/2"	29"	19	4.0
FS1106HD	6'	3"	24"	41"	27	7.1
FS1108HD	8'	3"	27 1/2"	54"	37	10.6
FS1110HD	10'	3"	31"	66"	47	14.8
FS1112HD	12'	3"	34 1/2"	78"	59	19.7

**375 lbs.**  
TYPE IAA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS STEPLADDER

FS1400HD SERIES



### Da Boot™

Polypropylene copolymer upper boot provides strength, durability and fiberglass rail surface protection. Thick non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot and provides a slip resistant footing. Inside, Da Boot™ has a unique open design that allows for quick and easy visual inspection of the fiberglass rail.

Patent Pending #10/207/926 & #10/208.132



### Molded Top With Handyman's Tool Slots

Rugged, nonconductive structural molded top is extremely durable. Molded-in slots help keep tools close at hand.



### Full Channel Fiberglass Rail

Nonconductive full channel rails are covered with a polyester veil for years of durable service.



### Inside Spreader Braces

Spreader braces inside fiberglass rails help keep braces from getting hooked or abused during transit.



### Heavy Double Gusset Bracing

Heavy duty steel gussets on each step and angle back braces.



### Wide Back Braces

Vertically mounted U-shaped back braces spaced on one foot intervals provide maximum stiffness and discourage unsafe climbing. Heavy duty bottom back brace provides additional strength to the bottom of the ladder.



### Riveted Step Construction with Gussets

Each step features heavy duty steel gussets secured with large-headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets. Two pair of steel gussets under bottom step for extra support. All gussets are heavy duty steel.

MODEL	STEP SIZE	BOTTOM SIZE	APPROX. WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FS1404HD	4'	3"	18 1/2"	28"	15	3.13
FS1406HD	6'	3"	21 1/2"	40"	21	5.49
FS1408HD	8'	3"	24 1/2"	52"	28	8.29
FS1410HD	10'	3"	27 1/2"	65"	34	11.67
FS1412HD	12'	3"	30 1/2"	78"	55	15.49





**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS STEPLADDER

FS1500 SERIES



### Da Boot™

Polypropylene copolymer upper boot provides strength, durability and fiberglass rail surface protection. Thick non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot and provides a slip resistant footing. Inside, Da Boot™ has a unique open design that allows for quick and easy visual inspection of the fiberglass rail.

Patent Pending #10/207/926 & #10/208.132




### Molded Top With Tool Slots

Rugged, nonconductive structural molded top is extremely durable. Molded-in slots help keep tools close at hand.




### Wide Back Braces

Vertically mounted U-shaped back braces spaced on one foot intervals provide maximum stiffness and discourage unsafe climbing.




### Double-Rivet Step Construction

Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



### Inside Spreader Braces

Spreader braces inside fiberglass rails help protect braces from getting hooked or abused in transit.



### Full Channel Fiberglass Rail

Nonconductive full channel rails are covered with a polyester veil for years of service without fiber prominence or blooming.



MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FS1502*	2'	3"	17"	18 1/4"	10	2.07
FS1504	4'	3"	18 7/8"	28"	13	3.18
FS1505	5'	3"	20 3/4"	34"	17	4.27
FS1506	6'	3"	21 1/2"	40"	20	5.49
FS1508	8'	3"	24 1/2"	52"	27	8.29
FS1510	10'	3"	27 1/2"	65"	34	11.67
FS1512	12'	3"	30 1/2"	78"	47	15.49

\* FS1502 is a folding step stand and is not equipped with Da Boot™

**250 lbs.**  
TYPE I  
load capacity\*  
\*Includes weight of user plus materials


# FIBERGLASS STEPLADDER

FS2000 SERIES




### Molded Top With Handyman's Tool Slots

Rugged, nonconductive structural molded top is extremely durable. Molded-in slots help keep tools close at hand.




### Pinch Resistant Spreader Braces

Heavy duty plated steel spreader braces with double rivet hinge to protect user from pinched fingers.



### Slip Resistant Rubber Feet

Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.



### Double-Rivet Step Construction

Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



### Optional Molded Pail Shelf

Self-closing, nonconductive pail shelf available as field mount option. Skid resistant surface and outer retaining edge.

MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FS2004	4'	3"	18 7/8"	28"	11	3.18
FS2005	5'	3"	20 3/4"	34"	14	4.27
FS2006	6'	3"	21 1/2"	40"	16	5.49
FS2008	8'	3"	24 1/2"	52"	22	8.29



**375 lbs.**  
TYPE IAA  
load capacity\*

# FIBERGLASS TWIN FRONT LADDER

FM1400HD SERIES



**Heavy Gauge Steel Hinges**  
Heavy duty hinge assembly design for maximum durability.




**Da Boot™**  
Polypropylene copolymer upper boot provides strength, durability and fiberglass rail surface protection. Thick non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot and provides a slip resistant footing. Inside, Da Boot™ has a unique open design that allows for quick and easy visual inspection of the fiberglass rail.




Patent Pending #10/207/926 & #10/208.132




**Riveted Step Construction with Gussets**  
Each step features heavy duty steel gussets secured with large-headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



**Spreader Brace Reinforcement Plates**  
Four key stress areas are reinforced with steel plates to prolong ladder life.



**Full Channel Fiberglass Rail**  
Nonconductive full channel rails are covered with a polyester veil for years of durable service.



**Inside Spreader Braces**  
Spreader braces inside fiberglass rails help keep braces from getting hooked or abused during transit.



**Heavy Double Gusset Bracing**  
Heavy duty steel gussets on each step and angle back braces.



BOTH SIDES of an FM1400HD twin front ladder can be used simultaneously by one person per side. Each side is designed to support one person including materials up to 375lbs. Total combined weight on ladder must not exceed 750lbs. (375lbs. per side).



MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FM1404HD	4'	3"	18 7/8"	36"	21	2.6
FM1405HD	5'	3"	20 7/8"	45"	25	3.4
FM1406HD	6'	3"	21 7/8"	52"	29	4.3
FM1407HD	7'	3"	22 7/8"	60"	34	5.2
FM1408HD	8'	3"	24 7/8"	67"	38	6.0
FM1410HD	10'	3"	27 7/8"	83"	56	8.2
FM1412HD	12'	3"	30 7/8"	98"	68	10.6
FM1414HD*14'	14'	3"	33 7/8"	113"	81	12.5
FM1416HD*16'	16'	3"	36 7/8"	128"	92	14.4

\*SPECIAL DUTY: MANUFACTURED TESTED TO 375 LBS.

**300 lbs.**  
TYPE IA  
load capacity\*


# FIBERGLASS TWIN FRONT LADDER

FM1500 SERIES



**Da Boot™**  
Polypropylene copolymer upper boot provides strength, durability and fiberglass rail surface protection. Thick non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot and provides a slip resistant footing. Inside, Da Boot™ has a unique open design that allows for quick and easy visual inspection of the fiberglass rail.


Patent Pending #10/207/926 & #10/208.132




**Heavy Gauge Steel Hinges**  
Heavy duty hinge assembly design for maximum durability.



**Inside Spreader Braces**  
Spreader braces inside fiberglass rails help protect braces from getting hooked or abused in transit.



**Full Channel Fiberglass Rail**  
Nonconductive full channel rails are covered with a polyester veil for years of durable service.



**Reinforced Bottom Step**  
Heavy duty bottom brace provides additional strength to the bottom of the ladder.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.

MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FM1503	3'	3"	17 7/8"	29"	15	1.8
FM1504	4'	3"	18 7/8"	36"	18	2.6
FM1505	5'	3"	20 7/8"	45"	21	3.4
FM1506	6'	3"	21 7/8"	52"	24	4.3
FM1508	8'	3"	24 7/8"	67"	33	6.0
FM1510	10'	3"	27 7/8"	83"	41	8.2
FM1512	12'	3"	30 7/8"	98"	58	10.6



BOTH SIDES of an FM1500 twin front ladder can be used simultaneously by one person per side. Each side is designed to support one person including materials up to 300 lbs. Total combined weight on ladder must not exceed 600lbs. (300lbs. per side).






**250 lbs.**  
TYPE I  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS STEPLADDER

FM2000 SERIES




BOTH SIDES of an FM2000 twin front ladder can be used simultaneously by one person per side. Each side is designed to support one person including materials up to 250 lbs. Total combined weight on ladder must not exceed 500 lbs. (250 lbs. per side).




**Heavy Gauge Steel Hinges**  
Heavy duty hinge assembly design for maximum durability.




**Pinch Resistant Spreader Braces**  
Heavy duty plated steel spreader braces with double rivet hinge to protect user from pinched fingers.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.



**Full Channel Fiberglass Rail**  
Nonconductive full channel rails are covered with a polyester veil for years of durable service.



MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FM2004	4'	3"	19 1/2"	36"	16	5.1
FM2006	6'	3"	22 1/2"	52"	22	8.7
FM2008	8'	3"	25 1/2"	67"	37	13.0
FM2010	10'	3"	28 1/2"	83"	45	18.1
FM2012	12'	3"	31 1/2"	98"	57	23.9


**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS TRIPOD LADDER

FT1000 SERIES



**Full Metal Boot™**  
Aluminum angle feet with thick slip resistant rubber tread. Reinforcement plates wrap around the rail for unsurpassed durability.




**Steel Reinforced Outrigger**  
Long outrigger supports spread out the base for extra stability.



**Center-Pull Spreader Brace**  
Unique center-pull spreader brace designed for one-hand operation. Brace is plated steel for extra durability.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



**Outrigger Rail Brackets**  
Provide smooth non-jagged surfaces at outrigger/ladder connection.



**Heavy Duty Gusset Bracing**  
Heavy duty gussets under the bottom step for extra support.

MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FT1004	4'	3"	32 1/2"	29"	17	4.2
FT1005	5'	3"	34"	35"	20	5.4
FT1006	6'	3"	35 1/2"	41"	23	7.2
FT1007	7'	3"	40 1/2"	48"	27	8.6
FT1008	8'	3"	42 3/8"	54"	31	10.7
FT1010	10'	3"	52 1/4"	66"	42	14.1
FT1012	12'	3"	55 1/4"	78"	51	19.7



**375 lbs.**  
TYPE IAA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS PLATFORM LADDER

FP1400HD SERIES



### Da Boot™

Polypropylene copolymer upper boot provides strength, durability and fiberglass rail surface protection. Thick non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot and provides a slip resistant footing. Inside, Da Boot™ has a unique open design that allows for quick and easy visual inspection of the fiberglass rail.

Patent Pending #10/207/926 & #10/208.132



### Top Rail Guard

Aluminum cross brace serves as a railing for working from the platform.




### Slip Resistant Platform

Large, fully serrated platform makes it possible to get closer to working area than on standard stepladders.



### Riveted Step Construction with Gussets

Each step features heavy duty steel gussets secured with large-headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



### New 375 lb. Rated Rail

Nonconductive full channel rails are covered with a polyester veil for years of service without fiber prominence or blooming.



MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FP1403HD	3'	3"	22 1/4"	38"	20	4.4
FP1404HD	4'	3"	24 1/4"	44"	24	5.4
FP1405HD	5'	3"	25 3/4"	50"	27	6.8
FP1406HD	6'	3"	27 1/4"	56"	30	8.2
FP1408HD	8'	3"	30 1/4"	68"	39	10.9
FP1410HD*	10'	3"	33 1/4"	80"	58	13.6
FP1412HD*	12'	3"	36 1/4"	92"	62	16.3

\*SPECIAL DUTY: MANUFACTURED TESTED TO 375 LBS.

**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS PLATFORM LADDER

FP1500 SERIES



### Da Boot™

Polypropylene copolymer upper boot provides strength, durability and fiberglass rail surface protection. Thick non-marring thermoplastic elastomer tread is bonded and mechanically fastened to the upper boot and provides a slip resistant footing. Inside, Da Boot™ has a unique open design that allows for quick and easy visual inspection of the fiberglass rail.

Patent Pending #10/207/926 & #10/208.132




### Top Rail Guard

Aluminum cross brace serves as a railing for working from the platform.



### Heavy Gusset Bracing

Two pair of steel gussets under bottom step for extra support. Heavy duty steel gussets on each angle back brace.




### Full Channel Fiberglass Rail

Nonconductive full channel rails are covered with a polyester veil for years of service without fiber prominence or blooming.



### Slip Resistant Platform

Large, fully serrated platform makes it possible to get closer to working area than on standard stepladders.



### Double-Rivet Step Construction

Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.

MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FP1504	4'	3"	24 1/4"	44"	23	5.4
FP1505	5'	3"	25 3/4"	50"	26	6.8
FP1506	6'	3"	27 1/4"	56"	29	8.2
FP1508	8'	3"	30 1/4"	68"	38	10.9
FP1510	10'	3"	33 1/4"	80"	56	13.6
FP1512	12'	3"	36 1/4"	92"	60	16.3






**375 lbs.**  
TYPE IAA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS STEP-TO-STRAIGHT LADDER


FC1200 SERIES




**Hinging Mechanism**  
Exclusive guide lock brackets form solid spreader braces when the unit is in the stepladder position and slide guides when extended. Extra heavy duty plated steel.




**Standard Pole Grip**  
Web pole grip to hold top of ladder against poles, pipes or corners. Made of flexible high strength nylon webbing with a 5" section of corrugated rubber tread.



**Utility-Style Safety Shoes**  
Heavy aluminum casting with thick wrap-around rubber tread on lower end of both sections. Used by utilities for solid footing at differing angles. Replaceable.



**Rung Lock**  
Heavy duty aluminum rung cradle for easy set-up in extended position. 11-1/2" wide rung support spreads the load over entire width of rung.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



MODEL	-SIZE- STEP	-SIZE- MAX. EXT.	FLARED SECTION MIN O.D.	FLARED SECTION MAX O.D.	PARALLEL SECTION O.D.	APPROX. WEIGHT	APPROX. CUBES
FC1206	6'	9'	17 1/2"	23 5/8"	14 5/8"	33	6.8
FC1207	7'	11'	17 1/2"	24 5/8"	14 5/8"	38	8.0
FC1208	8'	13'	17 1/2"	25 5/8"	14 5/8"	41	9.3

**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS EXTENSION TRESTLE LADDER


FX1100 SERIES



**Heavy Trestle Top Hinge**  
Extra heavy plated steel hinges form top of trestle and support slide guides for the fly section.




**Slide Guides & Spreader Braces**  
Plated steel spreader braces interlock with bottom pair of fly section slide guides. Steel backup washers and reinforcing back plates prolong life at key pivot points.




**Locking Bail**  
Hinged steel bail provides easy to use solution for locking fly section in place. Fly section can be raised or lowered in 12" increments without closing the trestle.



**Heavy Gusset Bracing**  
Two pair of gussets support bottom step. All gussets are heavy duty steel.



**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick rubber tread on all four legs to provide sure footing. Feet can be replaced when necessary.



**Channel & I-Beam Fiberglass Rail**  
Nonconductive full channel rails are covered with a polyester veil for years of service without fiber prominence or blooming.


MODEL	-SIZE- STEP	-SIZE- MAX. EXT.	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	INSIDE WIDTH FLY	OUTSIDE WIDTH FLY	APPROX. WEIGHT	APPROX. CUBES
FX1108	8'	12'6"	3"	33 1/2"	69"	15 1/2"	18 1/4"	73	16.9
FX1110	10'	15'6"	3"	39 1/2"	84"	15 1/2"	18 1/4"	91	22.7
FX1112	12'	19'6"	3"	45 1/2"	99"	15 1/2"	18 1/4"	108	29.5



**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS SHELF LADDER

FH1000HD SERIES



### Rubber Bumper

Ladder has parallel sides with thick rubber bumpers extending 6" down the side rails.



### Slip Resistant Rubber Feet

Aluminum angle feet with thick rubber tread on both legs to provide sure footing. Feet can be replaced when necessary.



### Heavy Gusset Bracing

Two pair of gussets support bottom step. All gussets are heavy duty steel.




### Double-Rivet Step Construction

Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



### Angled Steps

Steps are level when the ladder is set at proper working angle.



### Serrated Aluminum Steps

Fully serrated aluminum steps allow for a more secure footing.

MODEL	SIZE	STEP SIZE	WIDTH	APPROX. WEIGHT	APPROX. CUBES
FH1004	4'	3"	15 1/4"	9	1.6
FH1005	5'	3"	15 1/4"	11	2.0
FH1006	6'	3"	15 1/4"	13	2.3
FH1007	7'	3"	15 1/4"	16	2.7
FH1008	8'	3"	15 1/4"	18	3.1
FH1010	10'	3"	15 1/4"	22	3.5
FH1012	12'	3"	15 1/4"	25	3.9
FH1014	14'	3"	15 1/4"	28	4.3
FH1016	16'	3"	15 1/4"	31	4.6

**375 lbs.**  
TYPE IAA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS EXTENSION LADDER

FE4000HD SERIES




### QuickLatch®

QuickLatch® equipped runglock provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207



### Aluminum Plate Connection Rungs

Tempered aluminum rungs are hydraulically double crimped to aluminum plate. Each plate is fastened to side rails with four solid aluminum rivets.




### Full Metal Boot™

Extra heavy duty cast aluminum shoes with thick rubber tread. Exclusive Louisville Ladder design. Full swivel safety shoe can be used with tread down or in spike position.




### Outside Slide Guides

Two extra heavy duty outside slide guides secured to top of base section with four rivets per guide for maximum strength. Over extending stop on fly section.




### D-Shaped or Round Rungs

Tempered, serrated aluminum rungs provide for a slip-resistant surface.



### Mar-Resistant Rail End Caps

Impact resistant caps on all rail ends provide rail protection for longer life and protect work surfaces from marring.



### 375 lb. Rated Yellow Rail

Distinctive rail color offers ultra-high quality looks that separates this ladder from the rest.



## D-RUNG

MODEL	TWO SECTION EXTENSION LADDERS		APPROX. WEIGHT	APPROX. CUBES
	TOTAL LENGTH	MAX. EXTENDED LENGTH		
FE4216HD*16'	8'	13'	39	6.4
FE4220HD 20'	10'	17'	47	8.0
FE4224HD 24'	12'	21'	54	9.5
FE4228HD 28'	14'	25'	62	11.0

## ROUND RUNG

MODEL	TWO SECTION EXTENSION LADDERS		APPROX. WEIGHT	APPROX. CUBES
	TOTAL LENGTH	MAX. EXTENDED LENGTH		
FE4616HD*16'	8'	13'	38	6.4
FE4620HD 20'	10'	17'	46	8.0
FE4624HD 24'	12'	21'	53	9.5
FE4628HD 28'	14'	25'	61	11.0

## SPECIFICATIONS

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH BASE	INSIDE WIDTH FLY	OUTSIDE WIDTH BASE	OUTSIDE WIDTH FLY
16'-28'	3 1/4"	6"	15 3/8"	13 1/8"	17 3/8"	16 1/8"






**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS PLATE CONNECT EXTENSION LADDER


FE7000 SERIES



**D-Shaped or Round Rungs**  
Tempered, serrated aluminum rungs provide for a slip-resistant surface.



**Outside Slide Guides**  
Two extra heavy duty outside slide guides secured to top of base section with four rivets per guide for maximum strength. Over extending stop on fly section.



**Mar-Resistant Rail End Caps**  
Impact resistant caps on all rail ends provide rail protection for longer life and protect work surfaces from marring.




**Full Metal Boot™**  
Extra heavy duty cast aluminum shoes with thick rubber tread. Exclusive Louisville Ladder design. Full swivel safety shoe can be used with tread down or in spike position.

FEATURING THE EXCLUSIVE  
**FULL METAL BOOT**



**QuickLatch®**  
QuickLatch® equipped runglock provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207



**Aluminum Plate Connection Rungs**  
Aluminum rungs are hydraulically double crimped to aluminum plate. Each plate is fastened to side rails with four solid aluminum rivets.



**D RUNG**  
SINGLE LADDERS

MODEL	TOTAL LENGTH	APPROX. WEIGHT	APPROX. CUBES
FE7108	8'	18	3.0
FE7110	10'	23	3.9
FE7112	12'	27	4.8
FE7114	14'	31	5.5
FE7116	16'	37	6.4
FE7118	18'	54	9.3
FE7120	20'	60	10.3

**ROUND RUNG**  
SINGLE LADDERS

MODEL	TOTAL LENGTH	APPROX. WEIGHT	APPROX. CUBES
FE7508	8'	17	3.0
FE7510	10'	23	3.9
FE7512	12'	27	4.8
FE7514	14'	30	5.5
FE7516	16'	36	6.4
FE7518	18'	49	13.8
FE7520	20'	54	15.3

**D-RUNG**  
TWO SECTION EXTENSION LADDERS

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT	APPROX. CUBES
FE7216	16'	8'	13'	34	5.7
FE7220	20'	10'	17'	45	7.1
FE7224	24'	12'	21'	53	9.3
FE7228	28'	14'	25'	61	10.8
FE7232	32'	16'	29'	72	12.3
FE7236	36'	18'	32'	108	16.4
FE7240	40'	20'	35'	117	18.2

**ROUND RUNG**  
TWO SECTION EXTENSION LADDERS

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT	APPROX. CUBES
FE7616	16'	8'	13'	34	6.2
FE7620	20'	10'	17'	44	7.7
FE7624	24'	12'	21'	52	9.3
FE7628	28'	14'	25'	60	10.8
FE7632	32'	16'	29'	71	12.3
FE7636	36'	18'	32'	100	16.9
FE7640	40'	20'	35'	110	18.7

**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS EXTENSION LADDER

FE3200 SERIES



**QuickLatch®**  
QuickLatch® equipped runglock provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207




**Swivel Safety Shoes**  
Heavy duty plated steel shoes with thick rubber tread. Shoe can be used with tread down or in spike position.



**Outside Slide Guides**  
Two extra heavy duty outside slide guides secured to top of base section with four rivets per guide for maximum strength. Over extending stop on fly section.



**D-Shaped Rungs**  
Flat top, D-shape provides greater standing area than round rungs. Fully serrated for slip-resistant surface.



**Mar-Resistant Rail End Caps**  
Impact resistant caps on all rail ends provide rail protection for longer life and protect work surfaces from marring.

**D-RUNG**  
TWO SECTION EXTENSION LADDERS

MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT	APPROX. CUBES
FE3216*	16'	8'	13'	35	6.8
FE3220	20'	10'	17'	43	8.4
FE3224	24'	12'	21'	50	10.0
FE3228	28'	14'	25'	57	11.6
FE3232	32'	16'	29'	68	13.7
FE3236**	36'	18'	32'	77	15.4
FE3240**	40'	20'	35'	86	17.1

**SPECIFICATIONS**

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE BASE	WIDTH FLY	OUTSIDE BASE	WIDTH FLY
16'-28'	3 1/8"	5 3/4"	14 1/16"	13 1/16"	17 1/8"	16 7/16"
32'-40'	3 3/16"	6 1/8"	15 3/16"	14 3/16"	17 1/16"	16 1/16"

\*Does not include rope and pulley  
\*\*Type I, 250 lb. rated

STRAIGHT LADDERS NOT AVAILABLE IN FE3200 SERIES




**250 lbs.**  
TYPE I  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS EXTENSION LADDER

## FE1700 SERIES



**QuickLatch®**  
QuickLatch® equipped runglock provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207




**Swivel Safety Shoes**  
Heavy duty plated steel shoes with thick rubber tread. Shoe can be used with tread down or in spike position.



**D-Shaped Rungs**  
Flat top, D-shape provides greater standing area than round rungs. Fully serrated for slip-resistant surface.



**Outside Slide Guides**  
Two extra heavy duty outside slide guides secured to top of base section with four rivets per guide for maximum strength. Over extending stop on fly section.



**Mar-Resistant Rail End Caps**  
Impact resistant caps on all rail ends provide rail protection for longer life and protect work surfaces from marring.



### SPECIFICATIONS

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE BASE	WIDTH FLY	OUTSIDE BASE	WIDTH FLY
16'-20'	3 1/4"	5 3/4"	14 1/8"	13 1/8"	17 1/8"	16 1/8"
24'-28'	3 3/8"	6 1/2"	15 3/8"	14 3/8"	17 3/8"	16 3/8"


### D-RUNG

MODEL	TOTAL LENGTH	LENGTH		APPROX. WEIGHT	APPROX. CUBES
		EACH SECTION	MAX. EXTENDED LENGTH		
FE1716	16'	8'	13'	32	6.8
FE1720	20'	10'	17'	39	8.4
FE1724	24'	12'	21'	46	10.0
FE1728	28'	14'	25'	60	11.6


**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS MANHOLE LADDER

## FE8800 SERIES




**Utility-Style Safety Shoes**  
Heavy aluminum extrusion with thick rubber tread. Used by utilities for solid footing at differing angles.




**Round Rungs**  
Tempered round aluminum rungs are fully serrated for slip-resistant surface. Each rung end is hydraulically double crimped to side rail with two heat-treated aluminum discs.



**Narrow Design**  
Narrow fiberglass straight ladder especially designed for use in man-holes. All sizes are 14" wide.



**Rail Protectors**  
Rail protectors are 3' long and firmly secured with four rivets per side. The rail guards protect the side rails from damage by manhole rims.



**Full Channel Fiberglass Rail**  
Nonconductive full channel rails are covered with a polyester veil for years of durable service.



### SPECIFICATIONS

SIZES	RAIL DEPTH	INSIDE WIDTH	OUTSIDE WIDTH
8'-20'	3 1/4"	11 3/4"	14"

MODEL	TOTAL LENGTH	APPROX. WEIGHT	APPROX. CUBES
FE8808	8'	18	2.5
FE8810	10'	22	3.2
FE8812	12'	25	3.8
FE8814	14'	28	4.4
FE8816	16'	31	5.0
FE8818	18'	34	5.7
FE8820	20'	37	6.3


**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# FIBERGLASS/ALUMINUM INDUSTRIAL STEP STANDS


FY8000/AY8000 SERIES



**Large Molded Top**  
Large structural molded top measures 14" wide by 9-1/4" deep. Diamond tread for a slip-resistant platform.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



**Heavy Gusset Bracing**  
Heavy duty steel gussets to support bottom frame.



**Large Aluminum Steps**  
Steps are 6" wide, twice the area of a standard step, and feature heavy duty side connections.



**FIBERGLASS**


MODEL	SIZE	HEIGHT TO TOP STEP	TOP SIZE (WXD)	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
FY8001*	1'	13"	14" X 9 1/4"	6"	15 5/8"	15 3/4"	9	1.9
FY8002	2'	22 3/4"	14" X 9 1/4"	6"	18"	21"	12	5.0
FY8003	3'	34"	14" X 9 1/4"	6"	20"	27"	17	10.6
FY8004	4'	45 1/4"	14" X 9 1/4"	6"	22"	33"	22	19.0

\*Casters and handle option not available on this model

**ALUMINUM**

MODEL	SIZE	HEIGHT TO TOP STEP	TOP SIZE (WXD)	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
AY8001*	1'	11 1/2"	14" X 9 1/4"	6"	15 5/8"	14 1/4"	5	1.5
AY8002	2'	22 3/4"	14" X 9 1/4"	6"	18"	20 1/4"	8	4.7
AY8003	3'	34"	14" X 9 1/4"	6"	20"	26 1/4"	12	10.3
AY8004	4'	45 1/4"	14" X 9 1/4"	6"	22"	32 1/4"	17	18.7

\*Casters and handle option not available on this model




**Casters and Handle optional**  
Casters and Handle  
Accessory #S55S56




**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# THE ULTIMATE™ ARTICULATED LADDERS

L-2091/L-3092/L-4191 SERIES




**EasyHinge™**  
Durable, zinc plated steel hinge that features a positive acting lever for smooth and consistent locking and unlocking of the ladder sections, allowing the EasyHinge™ to be positioned at 180, 105 and 40 degree angles.



**Comfort**  
The wide 14" to 23" spacing between the side rails allows a comfortable working space.



**Built In Stabilizer**  
The unique flared end design provides a 23" wide base for support. Fiberglass model has a stabilizer bar.

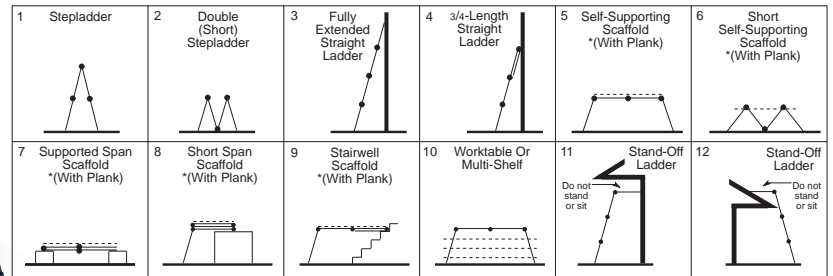

MODEL	DESC.	MATERIAL	EXTENDED HEIGHT	STEPLADDER HEIGHT	SCAFFOLD HEIGHT	FOLDED HEIGHT H X L	APPROX. WT. (LBS)	APPROX. CUBES	
L-2091-17	17 X 93	17"	ALUM	17'	8'5"	52"	54" x 24" x 10"	43	7.5
L-2092-13	13 X 93	13'	ALUM	13'	6'5"	40"	43" x 23" x 9"	36	5.15
L-2191-17*	17 X 93	17"	ALUM	17'	8'5"	52"	54" x 24" x 10"	40	7.5
L-3092-13	13 X 75	13'	FG	13'	6'5"	40"	43" x 23" x 9"	35	5.15
L-3092-15	15 X 75	15'	FG	15'	7'5"	52"	54" x 24" x 10"	37	7.5
L-4191-13*	13 X 51	13'	STEEL	13'	6'5"	40"	43" x 23" x 9"	33	5.2

\*Type I (250 lbs. working load)




**375 lbs.**  
TYPE IAA  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM STEPLADDER

AS1100HD SERIES




**Molded Top With Recessed Tray**  
Nonconductive structural molded top. Large parts tray recessed 1/4" deep with tool slots.



**Inside Spreader Braces**  
Spreader braces located inside of side rails protect braces from getting hooked or abused in transit.




**Side Rails**  
Heavy duty aluminum side rails are full channel extrusions on the front and back legs.




**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick shoes on all four legs to provide sure footing.



**Reinforcement Plates**  
Front and back doublers under the molded top provide extra reinforcement at critical wear points.



**Heavy Gusset Bracing**  
Two pairs of steel gussets on every step on ladders under 8' tall for extra support. Heavy duty steel gussets on each angle back brace.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, solid aluminum rivets for maximum strength.



**Optional Molded Pail Shelf**  
Self-closing, structural molded pail shelf. Skid resistant surface and outer retaining edge provide additional features.



Grade 1  
Canada

PENDING




MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
AS1104HD	4'	3"	19 3/8"	29"	14	3.3
AS1106HD	6'	3"	22 3/8"	41"	22	5.4
AS1108HD	8'	3"	25 3/8"	54"	28	7.7
AS1110HD	10'	3"	28 3/8"	66"	35	10.3
AS1112HD	12'	3"	31 3/8"	78"	44	13.2


**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM STEPLADDER


AS1000 SERIES



**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick shoes on all four legs to provide sure footing. Rubber tread can be replaced when necessary.



**Heavy Gusset Bracing**  
Two pairs of steel gussets on every step on ladders under 8' tall for extra support. Heavy duty steel gussets on each angle back brace.




**Double-Rivet Step Construction**  
Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



**Optional Molded Pail Shelf**  
Manual closing, structural molded pail shelf. Skid resistant surface and outer retaining edge provide additional features. (3'-12' only)



**Molded Top with Recessed Tray**  
Nonconductive structural molded top. Large parts tray recessed 1/4" deep with tool slots.



**Inside Spreader Braces**  
Spreader braces located inside of side rails protect braces from getting hooked or abused in transit.

MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
AS1003	3'	3"	18 3/8"	23"	10	2.4
AS1004	4'	3"	19 3/8"	29"	12	3.3
AS1005	5'	3"	21 3/8"	35"	16	4.3
AS1006	6'	3"	22 3/8"	41"	20	5.4
AS1008	8'	3"	25 3/8"	54"	26	7.7
AS1010	10'	3"	28 3/8"	66"	33	10.3
AS1012	12'	3"	31 3/8"	78"	41	13.2
AS1014*	14'	3 3/8"	34 3/8"	90"	64	24.1
AS1016*	16'	3 3/8"	37 3/8"	102"	72	29.7
AS1018*	18'	3 3/8"	40 3/8"	114"	81	35.3
AS1020*	20'	3 3/8"	43 3/8"	126"	92	41.3

\* Pail shelf not available on these models



Grade 1  
Canada








**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM STEPLADDER


## AS3000 SERIES



**Molded Top With Recessed Tray**  
Nonconductive structural molded top provides greater impact resistance and durability than aluminum tops. Large parts tray recessed 1/4" deep with tool slots.



**Center-Pull Spreader Braces (3 thru 6 ft. only)**  
Unique center-pull spreader brace for easy one-hand operation. Brace is plated steel for stiffness and durability.



**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.



**Molded Pail Shelf**  
Manual closing, structural molded pail shelf. Skid resistant surface and outer retaining edge provide additional features.



**Side Rails**  
Heavy duty aluminum side rails are full channel extrusions on the front and modified channel on back legs.



Meets or exceeds requirements of American National Standards Institute ANSI A14.2



MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
AS3002**	2'	3"	17 1/8"	20"	6	1.5
AS3003	3'	3"	17"	22"	10	2.1
AS3004	4'	3"	18 1/2"	28"	11	2.9
AS3005	5'	3"	20"	34"	13	3.7
AS3006	6'	3"	21 1/2"	40"	15	4.7
AS3008	8'	3"	24 1/2"	52"	21	6.7
AS3010	10'	3"	27 1/2"	64"	29	9.0

\*\* AS3002 is a folding step stand

**250 lbs.**  
TYPE I  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM STEPLADDER

## AS2100 SERIES



**Molded Top With Recessed Tray**  
Nonconductive structural molded top provides greater impact resistance and durability than aluminum tops. Large parts tray recessed 1/4" deep with tool slots.



**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.



**Pinch Resistant Spreader Braces**  
Heavy duty plated steel spreader braces with double rivet hinge to protect user from pinched fingers.



**Molded Pail Shelf**  
Self-closing, structural molded pail shelf. Skid resistant surface and outer retaining edge provide additional features.



Meets or exceeds requirements of American National Standards Institute ANSI A14.2



MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
AS2104	4'	3"	18"	27"	9	2.9
AS2106	6'	3"	20 1/4"	39 1/4"	13	4.7
AS2108	8'	3"	23"	51"	19	6.7
AS2110	10'	3"	25 1/2"	64 1/2"	26	9.0

**225 lbs.**  
TYPE II  
load capacity\*  
\*includes weight of user plus materials

# ALUMINUM STEPLADDER


AS4000 SERIES



**Molded Top With Recessed Tray**  
Nonconductive structural molded top provides greater impact resistance and durability than aluminum tops. Large parts tray recessed 1/4" deep with tool slots.



**Pinch Resistant Spreader Braces**  
Heavy duty plated steel spreader braces with double rivet hinge to protect user from pinched fingers.



**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.



**Molded Pail Shelf**  
Self-closing, structural molded pail shelf. Skid resistant surface and outer retaining edge provide additional features.



meets or exceeds requirements of American National Standards Institute ANSI A14.2



MODEL	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
AS4003	3' 3"	17"	22"	10	2.4
AS4004	4' 3"	18 1/2"	28"	11	2.9
AS4005	5' 3"	20"	34"	13	3.8
AS4006	6' 3"	21 1/2"	40"	15	4.7
AS4008	8' 3"	24 1/2"	52"	21	6.8


**375 lbs.**  
TYPE IAA  
load capacity\*  
\*includes weight of user plus materials

# ALUMINUM TWIN FRONT LADDER


AM1100HD SERIES




**Heavy Gusset Bracing**  
Braces located every 12" on models under 8' tall. Two pair of steel gussets on every step for extra support. Heavy duty steel gussets on each angle back brace.




**Inside Spreader Braces**  
Extra thick spreader braces located inside of side rails help protect braces from getting hooked or abused in transit.




**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.




**Heavy Gauge Steel Hinges**  
Heavy duty hinge assembly design for maximum durability.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, solid rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



**Full Channel Rail**  
Extra heavy duty, full channel, rugged extruded aluminum side rails on front and back.



**Spreader Brace Reinforcement Plates**  
Four key stress areas are reinforced with aluminum plates to prolong ladder life.

MODEL	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
AM1104HD	4' 3"	19 3/4"	36"	20	3.9
AM1106HD	6' 3"	22 3/4"	52"	27	6.3
AM1108HD	8' 3"	25 3/4"	67"	35	9.1
AM1110HD	10' 3"	28 3/4"	83"	46	12.2
AM1112HD	12' 3"	31 3/4"	98"	53	15.6



meets or exceeds requirements of American National Standards Institute ANSI A14.2




BOTH SIDES of an AM1100HD twin front ladder can be used simultaneously by one person per side. Each side is designed to support one person including materials up to 375lbs. Total combined weight on ladder **must not** exceed 750lbs. (375lbs. per side).


**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM TWIN FRONT LADDER


AM1000 SERIES




**Heavy Gauge Steel Hinges**  
Heavy duty hinge assembly design for maximum durability.




**Spreader Brace Reinforcement Plates**  
Four key stress areas are reinforced with aluminum plates to prolong ladder life.



**Full Channel Rail**  
Extra heavy duty, full channel, rugged extruded aluminum side rails on front and back.



**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, solid rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



BOTH SIDES of an AM1000 twin front ladder can be used simultaneously by one person per side. Each side is designed to support one person including materials up to 300 lbs. Total combined weight on ladder must not exceed 600lbs. (300lbs. per side).



MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
AM1003	3'	3"	18 1/4"	30"	14	2.7
AM1004	4'	3"	19 3/4"	36"	17	3.9
AM1005	5'	3"	21 1/4"	45"	20	5.1
AM1006	6'	3"	22 3/4"	52"	24	6.3
AM1008	8'	3"	25 3/4"	67"	32	9.1
AM1010	10'	3"	28 3/4"	83"	43	12.2
AM1012	12'	3"	31 3/4"	98"	50	15.6
AM1014	14'	3 5/8"	34 3/4"	112"	84	21.5
AM1016	16'	3 5/8"	37 3/4"	127"	99	26.0
AM1018	18'	3 5/8"	40 3/4"	143"	114	30.9
AM1020	20'	3 5/8"	43 3/4"	158"	129	36.2

**375 lbs.**  
TYPE IAA  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM PLATFORM STEPLADDER


AP1100HD SERIES



**Slip Resistant Platform**  
Large, fully serrated platform makes it possible to get closer to working area than on standard stepladders.



**Heavy Duty Gusset Bracing**  
Heavy duty steel gussets on each step provide maximum strength and stability.



**Top Rail Guard**  
Aluminum cross brace serves as a railing for working from the platform.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



**Full Channel Rail**  
Extra heavy duty, full channel, rugged extruded aluminum side rails.



**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.




MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
AP1104HD	4'	3"	24 1/2"	42"	23	9.1
AP1106HD	6'	3"	28"	54"	30	12.9
AP1108HD	8'	3"	31 1/2"	66 1/2"	40	17.0

**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM PLATFORM STEPLADDER

AP1000 SERIES




### Slip Resistant Platform

Large, fully serrated platform 15-7/8" wide by 20-1/4" deep locks ladder in place when open.




### Top Rail Guard

Aluminum cross brace serves as a railing for working from the platform.



### Double-Rivet Step Construction

Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



### Slip Resistant Rubber Feet

Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.



### Heavy Gusset Bracing

Two pair of steel gussets under bottom step for extra support. Heavy duty steel gussets on each angle back brace.



### Full Channel Rail

Extra heavy duty, full channel, rugged extruded aluminum side rails.



US  
Grade 1  
Canada



Meets or exceeds requirements of American National Standards Institute ANSI A14.2



MEETS OSHA REQUIREMENTS

SIZE TO STEP BOTTOM APPROX. APPROX. APPROX.  
MODEL PLATFORM SIZE WIDTH SPREAD WEIGHT CUBES

AP1003	3'	3"	22 1/4"	38"	18	7.4
AP1004	4'	3"	24 1/4"	44"	21	9.1
AP1005	5'	3"	25 1/4"	50"	24	11.0
AP1006	6'	3"	27 1/4"	56"	28	12.9
AP1008	8'	3"	30 1/4"	68"	38	17.0
AP1010	10'	3"	33 1/4"	80"	45	21.5
AP1012	12'	3 1/4"	36 1/4"	92"	66	26.5
AP1014	14'	3 1/4"	39 1/4"	104"	74	31.8
AP1016	16'	3 1/4"	42 1/4"	116"	83	37.6

**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM MOBILE MATERIAL HANDLING LADDER

AP5000 SERIES

**BODYWEIGHT**  
ACTIVATED CASTER TECHNOLOGY



### Bodyweight™ Activated Caster Technology

The AP5000 series features Body Weight Activated Caster Technology™. 4 swivel casters, mounted on a front cam mechanism and rear springs, make the AP5000 easy to use in material handling applications. Simply press the front pedal to lift ladder onto swivel casters for transport. Then stand on the ladder and casters automatically retract, leaving slip resistant shoes in contact with floor during climbing and use.



### Handrails

Handrails for accessing platform are standard on 6'-10' models.



### Heavy Gusset Bracing

Two pair of steel gussets under bottom step for extra support. Heavy duty steel gussets on each angle back brace.



### Slip Resistant Platform

Large, fully serrated platform makes it possible to get closer to working area than on standard stepladders.



### Double-Rivet Step Construction

Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



### Top Rail Guard

Aluminum cross brace serves as a railing for working from the platform.



US  
Grade 1  
Canada  
PENDING



Meets or exceeds requirements of American National Standards Institute ANSI A14.2



MEETS OSHA REQUIREMENTS

HEIGHT TO STEP BOTTOM APPROX. CASTER APPROX. APPROX.  
MODEL PLATFORM SIZE WIDTH SPREAD SIZE HANDRAILS WEIGHT CUBES

AP5004	4'	3"	24-1/4"	44"	3"	NO	30	17.0
AP5006	6'	3"	27-1/4"	56"	3"	YES	52	20.1
AP5008	8'	3"	30-1/4"	68"	3"	YES	64	23.0
AP5010	10'	3"	33-1/4"	80"	3"	YES	76	29.2

**300 lbs.**  
TYPE IA  
load capacity\*  
\*includes weight of user plus materials

# ALUMINUM EXTENSION TRESTLE LADDER


## AX1000 SERIES




Meets or exceeds requirements of American National Standards Institute  
**ANSI A14.2**




**Heavy Trestle Top Hinge**  
Extra heavy plated steel strap hinges form top of trestle and support slide guides for the fly section.



**Slide Guides & Spreader Braces**  
Plated steel spreader braces interlock with the bottom pair of fly section slide guides.




**Locking Bail**  
Hinged steel bail provides easy to use solution for locking the fly section in place. Fly section can be raised or lowered in 12" increments without closing the trestle.



**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick rubber tread on all four legs to provide sure footing.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



**Full Channel Rail**  
Extra heavy duty, full channel, rugged extruded aluminum side rails on front and back.

MODEL	-SIZE-		STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	INSIDE WIDTH FLY	OUTSIDE WIDTH FLY	APPROX. WEIGHT	APPROX. CUBES
	STEP	MAX. EXT.							
AX1008	8'	12'6"	3"	33"	69"	15 1/2"	17 7/8"	56	16.9
AX1010	10'	15'6"	3"	39"	84"	15 1/2"	17 7/8"	70	22.7
AX1012	12'	19'6"	3"	45"	99"	15 1/2"	17 7/8"	86	29.5

**300 lbs.**  
TYPE IA  
load capacity\*  
\*includes weight of user plus materials

# ALUMINUM SHELF LADDER


## AH1000 SERIES




**Rubber Bumper**  
The parallel sides are equipped with thick rubber bumpers extending 6" down the side rails.




**Heavy Gusset Bracing**  
Two pair of steel gussets under bottom step for extra support. All gussets are heavy duty steel.



**Slip Resistant Rubber Feet**  
Aluminum angle feet with thick rubber tread on both legs to provide sure footing.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.



**Angled Steps**  
Steps are level when the ladder is set at proper working angle.

MODEL	SIZE	STEP SIZE	WIDTH	APPROX. WEIGHT	APPROX. CUBES
AH1004	4'	3"	15 1/2"	7	1.6
AH1005	5'	3"	15 1/2"	8	2.0
AH1006	6'	3"	15 1/2"	10	2.3
AH1007	7'	3"	15 1/2"	11	2.7
AH1008	8'	3"	15 1/2"	13	3.1
AH1010	10'	3"	15 1/2"	17	3.5
AH1012	12'	3"	15 1/2"	19	3.9
AH1014	14'	3"	15 1/2"	21	4.3
AH1016	16'	3"	15 1/2"	23	4.6



Meets or exceeds requirements of American National Standards Institute  
**ANSI A14.2**

**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM AIRCRAFT DEICING LADDER


AH8000 SERIES



**Fixed Rubber Utility Shoe**  
Makes setup easy and resists slipping.



**Tool Holder**  
Securely holds inspection wand (wand included).



**Full Coverage Rubber Wing Pads**  
Pads cover all corners and edges. Fasteners are recessed so they cannot mar the aircraft.



**Protective Top Caps**  
Protects aircraft and user from sharp edges.



**Carry Handles**  
Dual handles positioned for balanced carrying.



**Fully Gusseted Construction**  
Four gussets per step provide maximum strength and stability.



MODEL	STEP SIZE	BOTTOM SIZE	APPROX. WIDTH	APPROX. WEIGHT	APPROX. CUBES
-------	-----------	-------------	---------------	----------------	---------------

AH8008 8' 3" 25 3/4" 36 lb. 26.3

Highest standing level 5' 9"  
Fits wing heights from 76" - 92" (6' 4" - 7' 9").

Includes inspection wand


**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM AIRCRAFT MECHANIC LADDER

AM8000 SERIES




**Durable Design**  
Non-folding design is extremely rigid with no hinges or joints to loosen.




**Extra Large Top Platform**  
20" X 21" platform allows for a stable working area.\*



**Solid Rubber Foot Pads**  
Skid resistant pads are a full 3/4" thick for long life in abrasive and oily conditions.



**Tilt and Roll**  
Fixed direction casters roll easily without wobbling.



**Double-Rivet Step Construction**  
Each step secured with six, large headed, semi-tubular steel rivets for maximum strength. 30% greater shear strength than solid aluminum rivets.

MODEL	STEP SIZE	BOTTOM SIZE	APPROX. SPREAD	APPROX. PRODUCT WEIGHT	APPROX. CUBES
-------	-----------	-------------	----------------	------------------------	---------------

AM8003	3'	3 3/4"	30 1/2"	44 1/4"	49	9.7
AM8004	4'	3 3/4"	32"	51 3/4"	55	13.4
AM8006	6'	3 3/4"	35"	66 1/2"	69	21.7
AM8008	8'	3 3/4"	38"	81 1/2"	85	31.3
AM8010	10'	3 3/4"	41"	96 1/4"	100	42.0
AM8012	12'	3 3/4"	44"	111"	115	53.9
AM8014	14'	3 3/4"	47"	125 3/8"	134	67.1

\*Optional guard rail required for top platform access (091023), unless used in an enclosed





**375 lbs.**  
TYPE IAA  
load capacity\*  
\*includes weight of user plus materials

# ALUMINUM EXTENSION LADDER

AE1200HD SERIES



### QuickLatch®

QuickLatch® equipped runglock provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207




### Swivel Safety Shoes

Extra heavy duty cast aluminum shoes with thick rubber tread. Full swivel safety shoe can be used with tread down or in spike position.




### D-Shaped Rungs

Tempered aluminum rungs are hydraulically double crimped to side rails and fully serrated for slip-resistant surface.




### Mar-Resistant Rail End Caps

Impact resistant caps on all rail ends provide rail protection for longer life and protect work surfaces from marring.



### Full I-Beam

Side rails are extra heavy duty 3" I-beam extrusions for maximum strength.



### Outside Slide Guides

Four extra heavy duty outside slide guides secured to top of base section with four rivets per guide. One pair of interlocking inside trail guides at bottom of fly section.

### D RUNG

MODEL	TOTAL LENGTH	LENGTH		APPROX. WEIGHT	APPROX. CUBES
		EACH SECTION	MAX. EXTENDED LENGTH		
AE1216HD*	16'	8'	13'	36	6.1
AE1220HD	20'	10'	17'	43	7.5
AE1224HD	24'	12'	21'	50	9.0
AE1228HD	28'	14'	25'	57	10.4
AE1232HD	32'	16'	29'	70	11.9
AE1236**	36'	18'	32'	78	13.4
AE1240**	40'	20'	35'	85	14.8
AE1244***	44'	22'	39'	107	20.0
AE1248***	48'	24'	43'	117	21.8

\*Does not include rope and pulley.  
\*\*300 lb. Type IA rated standard ladder.  
\*\*\*250 lb. Type I rated standard ladder.

### SPECIFICATIONS

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE BASE	WIDTH FLY	OUTSIDE BASE	WIDTH FLY
16'-40'	3"	5 1/4"	16 1/2"	14 3/8"	19 1/8"	16 1/8"
44'-48'	4"	6 3/8"	18"	15 1/8"	20 3/8"	18 3/8"

**300 lbs.**  
TYPE IA  
load capacity\*  
\*includes weight of user plus materials

# ALUMINUM STACKED EXTENSION LADDER

AE2800 SERIES



### QuickLatch®

QuickLatch® equipped runglock provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207



### Swivel Safety Shoes

Extra heavy duty cast aluminum shoes with thick rubber tread. Full swivel safety shoe can be used with tread down or in spike position.



### Rubber Fly Section Shoes

Fly section is equipped with solid rubber end cap shoes enabling the fly section to be used separately as a straight ladder.




### Mar-Resistant Rail End Caps

Impact resistant caps on all rail ends provide rail protection for longer life and protect work surfaces from marring.



### D-Shaped Rungs

Tempered aluminum rungs are hydraulically double crimped to side rails and fully serrated for slip-resistant surface. D-shape provides greater standing area than round rungs.



### Stacked Aluminum I-Beam Rail

Wide fly section which can be removed and utilized as a single ladder. Extra heavy duty outside side guides secured to top of base section with four rivets per guide.

### D RUNG

MODEL	TOTAL LENGTH	LENGTH		APPROX. WEIGHT	APPROX. CUBES
		EACH SECTION	MAX. EXTENDED LENGTH		
AE2816*	16'	8'	13'	31	6.3
AE2820	20'	10'	17'	37	7.8
AE2824	24'	12'	21'	43	9.3
AE2828	28'	14'	25'	56	10.8
AE2832	32'	16'	29'	63	12.3
AE2836	36'	18'	32'	76	13.8
AE2840	40'	20'	35'	85	15.3

\* Does not include rope and pulley

### SPECIFICATIONS


SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE BASE	WIDTH FLY	OUTSIDE BASE	WIDTH FLY
16'-40'	3"	6"	15 3/4"	15 3/4"	18"	18"



**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials



# ALUMINUM EXTENSION LADDER

AE2000 SERIES



### Outside Slide Guides

Two extra heavy duty outside slide guides secured to top of base section with four rivets per guide. One pair of interlocking inside trail guides at bottom of fly section.



### QuickLatch®


QuickLatch® equipped runglock provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207

### Swivel Safety Shoes

Extra heavy duty steel shoes with thick rubber tread. Full swivel safety shoe can be used with tread down or in spike position.


### Full I-Beam

Side rails are extra heavy duty 3" I-beam extrusions for maximum strength.



### D-Shaped Rungs

Tempered aluminum rungs are hydraulically double crimped to side rails and fully serrated for slip-resistant surface. D-shape provides greater standing area than round rungs.



### Mar-Resistant Rail End Caps

Impact resistant caps on all rail ends provide rail protection for longer life and protect work surfaces from marring.



### SPECIFICATIONS

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH BASE	WIDTH FLY	OUTSIDE WIDTH BASE	WIDTH FLY
16'-24'	3"	5 1/4"	15 1/8"	13 1/8"	17 1/8"	15 1/8"
28'-40'	3"	5 1/4"	15 1/8"	13 1/4"	18"	15 1/8"

### D RUNG

SINGLE LADDERS			
MODEL	TOTAL LENGTH	APPROX. WEIGHT	APPROX. CUBES
AE2108	8'	14	3.1
AE2110	10'	17	3.8
AE2112	12'	20	4.6
AE2114	14'	24	5.3
AE2116	16'	31	6.1
AE2118	18'	36	6.8
AE2120	20'	40	7.5

### D RUNG

TWO SECTION EXTENSION LADDERS					
MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT	APPROX. CUBES
AE2216*	16'	8'	13'	30	5.7
AE2220	20'	10'	17'	37	7.0
AE2224	24'	12'	21'	42	8.4
AE2228	28'	14'	25'	55	9.9
AE2232	32'	16'	29'	62	11.2
AE2236	36'	18'	32'	74	12.6
AE2240	40'	20'	35'	82	14.0

\*Does not include rope and pulley.

**250 lbs.**  
TYPE I  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM EXTENSION LADDER

AE3000 SERIES




### QuickLatch®

QuickLatch® equipped runglock provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207




### Swivel Safety Shoes

Extra heavy duty steel shoes with thick rubber tread. Full swivel safety shoe can be used with tread down or in spike position.



### Mar-Resistant Blue End Caps

Impact resistant, caps on top and bottom of fly section provide rail protection, longer life and durability. The caps also help protect work surfaces from marring.



### Modified I-Beam

Side rails are full 3" extrusions shaped into a modified I-beam for strength and light weight. Interlocking rails keep fly and base sections from coming apart.



### D-Shaped Rungs

Tempered aluminum rungs are hydraulically double crimped to side rails and fully serrated for a slip-resistant surface. D-shape provides greater standing area than round rungs.

### SPECIFICATIONS

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH BASE	WIDTH FLY	OUTSIDE WIDTH BASE	WIDTH FLY
16'-40'	3"	5 1/4"	15 1/8"	13 1/8"	17 1/2"	16 3/8"

### D RUNG

TWO SECTION EXTENSION LADDERS					
MODEL	TOTAL LENGTH	LENGTH EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT	APPROX. CUBES
AE3216*	16'	8'	13'	25	7.1
AE3220	20'	10'	17'	30	8.8
AE3224	24'	12'	21'	35	10.5
AE3228	28'	14'	25'	50	12.2
AE3232	32'	16'	29'	57	13.9
AE3236	36'	18'	32'	71	15.6
AE3240	40'	20'	35'	78	17.3

\*Does not include rope and pulley.







**250 lbs.**  
TYPE I  
load capacity\*  
\*Includes weight of user plus materials


# ALUMINUM 3-SECTION EXTENSION LADDER




AE1660 SERIES

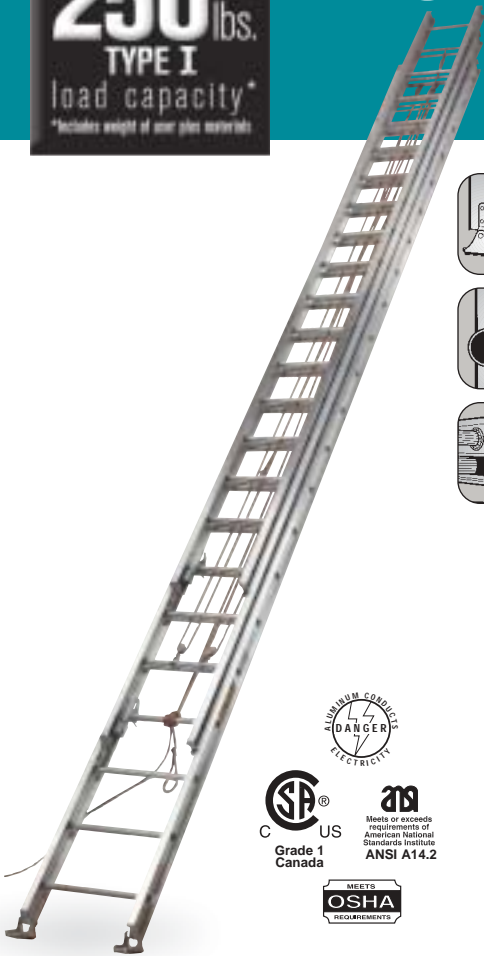


**Swivel Safety Shoes**  
Extra heavy duty cast aluminum shoes with thick rubber tread. Full swivel safety shoe can be used with tread down or in spike position.




**Round Rungs**  
Tempered round aluminum rungs are fully serrated for slip-resistant surface. Each rung end is hydraulically double crimped to side rail.



**Cast Rail End Caps**  
Extra heavy duty cast aluminum caps on all rail ends for rail protection, longer life and durability.



**Full I-Beam**  
Side rails are extra heavy duty 4" I-beam extrusions for maximum strength.



**Double Rope and Pulley**  
All aluminum double pulley system comes with a rot-resistant manila rope for all weather performance.



SIZE	RAIL DEPTH	STACK HEIGHT	SECTION LENGTH	INSIDE WIDTH	OUTSIDE WIDTH	
60'	4"	8 1/4"				
			Base Section	22'	18"	21 1/2"
			Center Section	20'	15 5/8"	18 13/16"
			Fly Section	18'	12 5/8"	16 1/8"

MODEL	TOTAL LENGTH	MAX. EXTENDED LENGTH	APPROX. WEIGHT	APPROX. CUBES
AE1660	60'	48'	173	28.0

**225 lbs.**  
TYPE II  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM EXTENSION LADDER


AE4000 SERIES




**QuickLatch®**  
QuickLatch® equipped runglock provides easier method of securing fly and base sections when extended. One-finger operation. Patent #5429207



**Swivel Safety Shoes**  
Extra heavy duty cast aluminum shoes with thick rubber tread. Full swivel safety shoe can be used with tread down or in spike position.



**D-Shaped Rungs**  
Tempered aluminum rungs are hydraulically double crimped to side rails and fully serrated for a slip-resistant surface. D-shape provides greater standing area than round rungs.



**Modified I-Beam**  
Side rails are full 3" extrusions shaped into a modified I-beam for strength and light weight. Interlocking rails keep fly and base sections from coming apart.

## SPECIFICATIONS

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16'-40'	3"	5 1/4"	15 1/4"	14 5/16"	17 1/8"	16 3/16"

## D RUNG

SINGLE LADDERS			
MODEL	TOTAL LENGTH	APPROX. WEIGHT	APPROX. CUBES
AE4108	8'	12	3.3
AE4110	10'	14	4.1
AE4112	12'	17	4.8
AE4114	14'	23	5.6
AE4116	16'	27	6.4
AE4118	18'	33	7.2
AE4120	20'	37	8.0

TWO SECTION EXTENSION LADDERS					
MODEL	LENGTH	MAX. TOTAL LENGTH EACH SECTION	EXTENDED LENGTH	APPROX. WEIGHT	APPROX. CUBES
AE4216*	16'	8'	13'	24	7.1
AE4220	20'	10'	17'	29	8.8
AE4224	24'	12'	21'	34	10.5
AE4228	28'	14'	25'	47	12.2
AE4232	32'	16'	29'	53	13.9
AE4236	36'	18'	32'	65	15.6
AE4240	40'	20'	35'	72	17.3

\* Does not include rope and pulley



**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials


# WOOD STEPLADDER

WS1000M SERIES



**ANSI**  
Meets or exceeds  
requirements of  
American National  
Standards Institute  
**ANSI A14.1**

MEETS  
**OSHA**  
REQUIREMENTS




### Rail Dimensions

Front and back rails with radiused edges and grooved steps hold up under daily use. Side rails are 1" x 3-1/4" on 3' to 12' models and 1" x 3-1/2" for the 14'-16" for the front rail. The back rail is 1" x 2-9/16".




### Extra Heavy Top Hinge

Extra heavy duty plated steel metal-to-metal hinge connects front rails and rear legs for rigidity and durability. Wraparound feature adds strength and protects top.



### Tie Rods & Truss Blocks

Each step fortified with plated steel rods, metal truss blocks and securely nailed. Tie rods are secured through plated steel washers on outside of ladder rails.



### Pinch Resistant Inside Spreader Braces


Heavy duty plated steel spreader braces with double rivet hinge to protect user from pinched fingers. Mounted with steel backup washers to assure easy action and protect ladder rails. (Through 7')

MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
WS1003M	3'	3 1/2"	17 3/4"	23"	15	2.6
WS1004M	4'	3 1/2"	18 3/4"	29"	21	3.8
WS1005M	5'	3 1/2"	20 3/4"	35"	27	5.1
WS1006M	6'	3 1/2"	21 3/4"	41"	32	6.5
WS1008M	8'	3 1/2"	24 3/4"	54"	41	9.8
WS1010M	10'	3 1/2"	27 3/4"	66"	52	13.7
WS1012M	12'	3 1/2"	30 3/4"	78"	62	18.2

**250 lbs.**  
TYPE I  
load capacity\*  
\*Includes weight of user plus materials

# WOOD STEPLADDER

WS3600M SERIES




### Rail Dimensions

Front and back rails with radiused edges and grooved steps with flush front edges. Side rails are 3/4" x 3-1/4" in front and 3/4" x 2-1/4" in back.



### Heavy Top Hinge

Heavy duty plated steel hinge connects front rails and rear legs for rigidity and durability. Wrap-around feature adds strength and protects top. Anti-split bracket on back rail.




### Pinch Resistant Inside Spreader Braces

Heavy duty plated steel spreader braces with double rivet hinge to protect user from pinched fingers. Mounted with steel backup washers to assure easy action and protect ladder rails. (Through 7')



### Tie Rods & Truss Blocks

Each step fortified with plated steel rods, metal truss blocks and securely nailed. Tie rods are secured through plated steel washers on outside of ladder rails.



### Back Rungs

Heavy 1-1/8" back rungs on 12" centers minimize twisting and walking. Rungs made of hickory, oak or ash and supported at bottom with heavy duty plated steel braces.

MODEL	SIZE	STEP SIZE	BOTTOM WIDTH	APPROX. SPREAD	APPROX. WEIGHT	APPROX. CUBES
WS3603M	3'	3 1/2"	18 3/4"	17"	13	1.4
WS3604M	4'	3 1/2"	20 1/2"	29"	17	3.1
WS3606M	6'	3 1/2"	24"	41"	20	5.0
WS3608M	8'	3 1/2"	27 1/2"	54"	35	7.2
WS3610M	10'	3 1/2"	31"	56"	45	9.7
WS3612M	12'	3 1/2"	34 1/2"	78"	57	12.5



**ANSI**  
Meets or exceeds  
requirements of  
American National  
Standards Institute  
**ANSI A14.1**


MEETS  
**OSHA**  
REQUIREMENTS



**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials


# WOOD EXTENSION LADDER

WE1700M / WE1800M SERIES




### Rail Dimensions

Side rails are made of select Hemlock or Douglas Fir with radiused edges. Side rails are 1-3/8" x 2-3/4" for 16'-28' and 1-3/8" x 3" for 32'-40' sizes.



### Gravity Rung Locks

Die cast aluminum, gravity type rung locks with super tough nylon flipper. Secured to side rails with 5/16" carriage bolt and plated steel bracket.



**Fully Rodded Hardwood Rungs**  
1-1/8" hardwood rungs. Fortified with tie rods secured through plated steel washers on outside of ladder rails.

**ANSI**  
Meets or exceeds requirements of American National Standards Institute  
**ANSI A14.1**

**OSHA**  
MEETS REQUIREMENTS

SINGLE LADDERS			
MODEL	LENGTH	MAX. APPROX. WEIGHT	APPROX. CUBES
WE1708M	8'	16	3.1
WE1710M	10'	20	3.8
WE1712M	12'	24	4.5
WE1714M	14'	29	5.3
WE1716M	16'	33	6.1
WE1718M	18'	42	7.4
WE1720M	20'	44	8.3

TWO SECTION EXTENSION LADDERS					
MODEL	TOTAL LENGTH	EACH SECTION	MAX. EXTENDED LENGTH	APPROX. WEIGHT	APPROX. CUBES
WE1816M	16'	8'	13'	37	12.1
WE1820M	20'	10'	17'	46	15.1
WE1824M	24'	12'	21'	55	18.1
WE1828M	28'	14'	25'	64	21.2
WE1832M	32'	16'	29'	73	24.2
WE1836M* 36'	18'	18'	32'	82	27.2
WE1840M* 40'	20'	20'	35'	91	30.2

\*Type I 250 lb. rated

### SPECIFICATIONS

SIZES	RAIL DEPTH	STACK HEIGHT	INSIDE WIDTH		OUTSIDE WIDTH	
			BASE	FLY	BASE	FLY
16'-28'	2 3/4"	4 3/4"	15 7/8"	12 1/2"	18 5/8"	15 1/4"
32'-40'	3"	5 1/8"	15 7/8"	12 1/2"	18 5/8"	15 1/4"

**250 lbs.**  
TYPE I  
load capacity\*  
\*Includes weight of user plus materials

# WOOD ATTIC LADDER

PREMIUM SERIES



### Adjustable

Easily adjustable spring tension.



### EZ-Hang Strap

Exclusive "EZ-Hang Strap" system for quick and easy installation.




### Added Strength

Wire rod under each step for strength.



### SWING CLEARANCE



MODEL	DIMENSIONS ROUGH CEILING OPENING	(A) FITS CEILING HEIGHTS MIN. MAX.	(B) APPROX. LANDING SPACE	(C) APPROX. PROJ. WIDTH	APPROX. WEIGHT	APPROX. CUBES
S224P	22-1/2" x 54"	7' 8'9"	67"	71"	53	8.5
L224P	22-1/2" x 54"	8'9" 10'	73"	79"	57	8.5
S254P	25-1/2" x 54"	7' 8'9"	67"	71"	56	9.5
L254P	25-1/2" x 54"	8'9" 10'	73"	79"	58	9.5

**ANSI**  
Meets or exceeds requirements of American National Standards Institute  
**ANSI A14.9**

**350 lbs.**  
load capacity\*  
\*Includes weight of user plus materials

# WOOD ATTIC LADDER

## BIG BOY SERIES



**Adjustable**  
Easily adjustable spring tension.



**Reinforced Steps**  
Wire rod under each step for strength.



**Corner Bracing**  
Extra corner bracing keeps stairway frame square.




**EZ-Hang Strap**  
Exclusive "EZ-Hang Strap" system for quick and easy installation.



**Metal Hinges**  
Metal hinges riveted on both sides of rail joints limit side to side motion.

**ANSI**  
Meets or exceeds requirements of American National Standards Institute **ANSI A14.9**

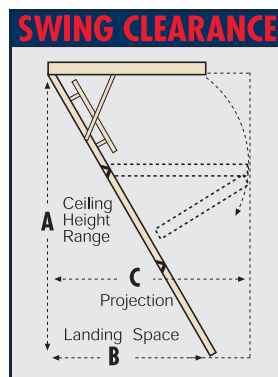

MODEL	DIMENSIONS ROUGH CEILING OPENING	(A) FITS CEILING HEIGHTS MIN. MAX.	(B) APPROX. LANDING SPACE	(C) APPROX. PROJ. WIDTH	APPROX. WEIGHT	APPROX. CUBES
S305P	30" x 60"	7' 8'9"	67"	71"	75	15
L305P	30" x 60"	8'9" 10'	73"	79"	82	15

**300 lbs.**  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# WOOD ATTIC LADDER

## CHAMPION SERIES



**Adjustable**  
Easily adjustable spring tension.




**EZ-Hang Strap**  
Exclusive "EZ-Hang Strap" system for quick and easy installation.



**Reinforced Steps**  
Wire rod under each step for strength.

**ANSI**  
Meets or exceeds requirements of American National Standards Institute **ANSI A14.9**

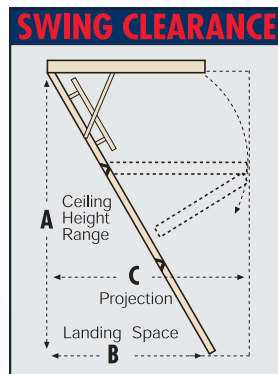

MODEL	DIMENSIONS ROUGH CEILING OPENING	(A) FITS CEILING HEIGHTS MIN. MAX.	(B) APPROX. LANDING SPACE	(C) APPROX. PROJ. WIDTH	APPROX. WEIGHT	APPROX. CUBES
CS224I	22-1/2" x 54"	7' 8'9"	67"	71"	64	8.5
CL224I	22-1/2" x 54"	8'9" 10'	73"	79"	70	8.5
CS254I	25-1/2" x 54"	7' 8'9"	67"	71"	65	9.5
CL254I	25-1/2" x 54"	8'9" 10'	73"	79"	71	9.5
CS224P	22-1/2" x 54"	7' 8'9"	67"	71"	64	8.5
CL224P	22-1/2" x 54"	8'9" 10'	73"	79"	70	8.5
CS254P	25-1/2" x 54"	7' 8'9"	67"	71"	65	9.5
CL254P	25-1/2" x 54"	8'9" 10'	73"	79"	71	9.5

I=Insulated Door / P=Standard Option Without Insulation



**350 lbs.**  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM ATTIC LADDER

## SUMMIT SERIES



**Adjustable**  
Easily adjustable spring tension.



**EZ-Hang Strap**  
Exclusive "EZ-Hang Strap" system for quick and easy installation.



**Angle Bracing**  
Angle bracing on top of each climbing section for strength and stability.




**Heavy Duty Hinges**  
Heavy duty hinges at rail joints limit side to side motion.



**Insulated Door**  
Fully insulated door void helps reduce energy costs.

MODEL	DIMENSIONS ROUGH CEILING OPENING	(A) FITS CEILING HEIGHTS		(B) APPROX. LANDING SPACE	(C) APPROX. PROJ. WIDTH	APPROX. WEIGHT	APPROX. CUBES
		MIN.	MAX.				
AS226P	22-1/2" x 54"	7'	8'9"	67"	71"	49	8.5
AL226P	22-1/2" x 54"	8'9"	10'	73"	79"	50	8.5
AS256P	25-1/2" x 54"	7'	8'9"	67"	71"	52	9.5
AL256P	25-1/2" x 54"	8'9"	10'	73"	79"	54	9.5

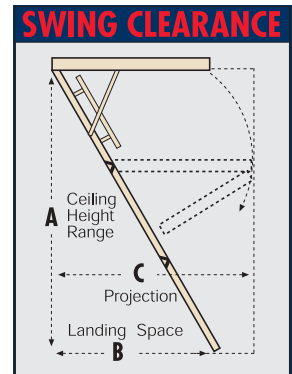

**350 lbs.**  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM ATTIC LADDER

## EVEREST SERIES



**Adjustable**  
Easily adjustable spring tension.



**Angle Bracing**  
Angle bracing on top of each climbing section for strength and stability.



**EZ-Hang Strap**  
Exclusive "EZ-Hang Strap" system for quick and easy installation.




**Insulated Door**  
Fully insulated door void helps reduce energy costs.



**Heavy Duty Hinges**  
Heavy duty hinges at rail joints limit side to side motion.

MODEL	DIMENSIONS ROUGH CEILING OPENING	(A) FITS CEILING HEIGHTS		(B) APPROX. LANDING SPACE	(C) APPROX. PROJ. WIDTH	APPROX. WEIGHT	APPROX. CUBES
		MIN.	MAX.				
AL258P	25-1/2"	10'	12'	90"	92"	67	11.9

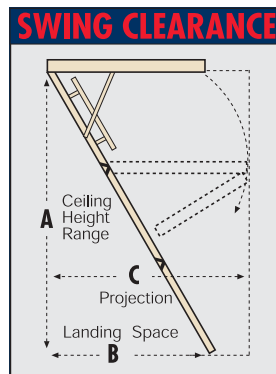

# STEEL DRY WALL CART

DC SERIES

Heavy Duty Dry Wall Cart specially designed for hauling heavy loads around work area. Equipped with four, 8" polypropylene casters: 4 swivel (DC-3), or 2 swivel and 2 rigid (DC-2), for ease in mobility. Premium Powder Coat Finish, which provides superior scratch and scuff resistance.

## DC-2 Model features:

- Four 8" polypropylene casters
- Two fixed rigid casters
- Two swivel casters

## DC-3 Model features:

- Extra mobility and durability
- Perimeter tube frame
- Four 8" polypropylene swivel casters



DC-2




MODEL	CASTERS	PLATFORM WIDTH	PLATFORM LENGTH	OVERALL WIDTH	OVERALL LENGTH	OVERALL HEIGHT (W/CASTERS)	SHIPPING DIMENSIONS L X W X H	APPROX. CUBES	WEIGHT	LOAD RATING
DC-2*	4	12"	43-5/8"	22"	43-1/2"	46-1/2"	43-5/8" x 22" x 37-1/4"	26	75	3000 LBS
DC-3**	4	12"	43-5/8"	22-3/4"	43-1/2"	46-1/2"	49-1/2" x 22-3/4" x 37-1/4"	31	94	3000 LBS

\*2 Swivel Casters

\*\*4 Swivel Casters

# MINI FORTRUSS® MOBILE WORK STAND

SM SERIES



### Center Locking Hinge

Employs a springloaded, locking pin, which automatically locks center hinge tubes in place.



### Two-Way Casters

Four positive locking, ball bearing casters provide a stable base. Non-marring casters have a quick release feature and are lock threaded into steel inserts in the scaffold's legs to reduce unit wobble.



### Exclusive Steel Wrap Weld Connection

Increases strength and durability.



### Premium Powder Paint

Baked on finish is durable and provides superior scratch and scuff resistance. Attractive, even coverage with no drips or runs.



### Storage

Folds easily for storage and transport.

## SPECIFICATIONS

**Adjustable Height:** The working height can be adjusted to 12", 24", 36", and 48".

**Ample Work Capacity:** Provides a large 17" x 43" work surface, along with 500 lbs. distributed load work capacity.

**End Frame Stops:** Exclusive non-pinching stops limit rotation of end frame to 90°.



Patent #5,555,954

## SM REPLACEMENT PARTS

ITEM NUMBER	DESCRIPTION
921010	Caster
396800A	Steel Plank

MODEL	CASTERS	WEIGHT	OVERALL LENGTH W/CASTERS	OVERALL HEIGHT W/CASTERS	OVERALL WIDTH	FOLDED UNIT WIDTH	PLANK WIDTH	PLANK LENGTH	PLANK HEIGHT ADJUSTABLE	LOAD RATING
SM1404A	4	60	47-1/2"	50-3/4"	22-1/2"	6-1/4"	8.5 (2) 17 overall	46-5/16"	12", 24", 36", & 48"	500lbs.

# FORTTRUSS<sup>®</sup> STEEL ROLLING TOWER SCAFFOLDS SS SERIES



Patented features and sturdy steel construction are combined in a single unit with strength, stability and ease of use unsurpassed in the industry. "Wobble" associated with rolling scaffolds has been dramatically reduced by its unique design. Easy single-man assembly and adjustment. 3' and 6' high models, 6' or 8' long. The platform is adjustable in 4-1/8" increments. The Forttruss<sup>®</sup> may be stacked, utilizing up to three units to a maximum height of 15 feet. Outriggers are required when stacking over 6 feet.

## SPECIFICATIONS

**End-Frames:** Full Height Unit 29" wide x 68" high (without casters)  
Half Unit 29" wide x 39" high (without casters)  
**Width (Assembled):** 29 1/2" with casters  
66 3/4" with outriggers and casters  
**Platform:** Exterior Grade, edge protected  
5/8" thick plywood  
6' unit—29" wide x 65 3/8" long  
8' unit—29" wide x 89 3/8" long

**Platform Height (Max):** with casters  
6' unit—6' 3"  
12' unit—11' 8"  
15' unit—14' 10"  
**Load Capacity:** 6' long unit—655 lbs. distributed load (50 lb/sq. ft.)  
8' long unit—450 lbs. distributed load (25 lb/sq. ft.)  
**Height of Handrail:** 42"


## SS REPLACEMENT PARTS

ITEM NUMBER	DESCRIPTION	APPROX. WEIGHT (LBS.)
305119A	42" End-Frame	17
305119B	68" End-Frame	26
395037A	6' Truss Assembly	24
395037B	8' Truss Assembly	26
595000A	6' Plywood Platform	30
595000B	8' Plywood Platform	39
398007	*Outriggers (Kit of 4)	50
928002	5" Caster w/Hardware	4
398006A	6' Guardrail & Toeboard Kit (4 sides)	60
398006B	8' Guardrail & Toeboard Kit (4 sides)	71
PK150 (2)	U-Pins, Springs, L-Knobs	5

\*Required on all stacked units over 6 feet in height—will not mount to 3' unit.




**Exclusive Dual-Pin Adjustment Mechanism**  
Pistol grip allows quick and easy one-man adjustment of platform height. Double the shear strength of a single pin design unit.




**Exclusive Caster Stem**  
Snaps into unit frame during assembly, eliminating nuisance drop-out of other casters.



**Tightening "L" Knob**  
Reduces wobble of unit when in use.



**Premium Powder Paint**  
Baked-on finish is durable and provides superior scratch and scuff resistance. Attractive, even coverage with no drips or runs.



**Guardrail and Toeboard Kit<sup>†</sup>**  
(Meets OSHA requirements)  
Two assemblies are easily installed and removed. 4-3/4" high steel toeboard is standard and welded in place. Gates swing inward, latch with gravity-operated latches.

<sup>†</sup> OSHA requires guardrail, toe-board and outriggers when the platform is more than 10' above the floor surface.



SS1506



SS0606



## ORDERING INFORMATION

Patent #5069309

MODEL	SIZE (H XL)	END FRAMES	TRUSS ASSEM.	PLYWOOD PLATFORM	OUTRIGGER CASTERS	GUARDRAIL & TOEBOARD KIT	APPROX. WEIGHT	CUBES
SS0306*	3'x6'	(2)3'	(2)6'	(1)6'	-	-	112	10.8
SS0308*	3'x8'	(2)3'	(2)8'	(1)8'	-	-	127	14.1
SS0606	6'x6'	(2)6'	(2)6'	(1)6'	(4)	-	154	10.8
SS0608	6'x8'	(2)6'	(2)8'	(1)8'	(4)	-	171	14.1
SS1206	12'x6'	(4)6'	(4)6'	(2)6'	(8)	(1)	418	42.1
SS1208	12'x8'	(4)1'	(4)8'	(2)8'	(8)	(1)	463	55.0
SS1506	15'x6'	(4)6' (2)3'	(6)6'	(3)6'	(8)	(1)	530	48.2
SS1508	15'x8'	(4)6' (2)3'	(6)8'	(3)8'	(8)	(1)	590	63.0

DO NOT STACK HIGHER THAN 3 UNITS TOTALING 15'. EACH SET OF END FRAMES REQUIRES ONE PAIR OF TRUSSES AND PLATFORM.


\*Without casters

# STEEL ROLLING WAREHOUSE LADDERS

GSW SERIES

Louisville Ladder steel rolling warehouse ladders are considered one of the best on the market. Ladder equipped with ball bearing casters allowing easy movement to any area. Rugged all steel construction. Sturdy handrails, easy 56 degree climbing angle, "Sure Grip" tread, 7" deep steps and 10" deep top platform provide quality features for the everyday user.

ALL SIZES MEET OR EXCEED THE REQUIREMENTS OF ANSI A14.7 AND OSHA 1910.29 STANDARDS WITH A **350 LB. LOAD RATING**




**Spring Loaded Casters**  
(standard on 2-step to 5-step models) Four spring loaded casters on 2-5 step models. Casters retract when load is placed on the ladder, setting the ladder firmly in place on rubber tips. When the load is removed, springs push down the casters enabling the ladder to move about freely.



**Locking Device**  
(standard on 6-step to 15-step models) Models 6-step and taller come equipped with a large 4" swivel caster in front and rigid casters in the rear. Stepping on bottom step activates the locking mechanism, locking rubber tipped feet in down position. To move the ladder, just step on the unlocking pedal.



**No Forward Descent**  
56 degree climbing angle does not meet ANSI requirements for forward descent.



**Toeboard**  
(standard on 12-step to 15-step models) The top platform on models 12-step and taller is surrounded on three sides by a 4" high toeboard. Can be added as an option to smaller size models. (W05)



**Premium Powder Paint**  
Baked-on finish is durable and provides superior scratch and scuff resistance. Attractive, even coverage with no drips or runs.

NEW LLG MODEL	STEPS	STEP WIDTH	PLATFORM HEIGHT	OVERALL HEIGHT	OVERALL DEPTH	OVERALL WIDTH	APPROX. CUBE	WEIGHT
<b>NO HANDRAILS</b>								
GSW1601A	1	16"	12"	12"	17"	19"	2.24	16
GSW1601-W04	1	16"	12"	12"	17"	19"	2.24	16
GSW1602	2	16"	20"	20"	19"	20"	6.66	25
GSW2402	2	24"	20"	20"	19"	28"	8.33	30
GSW2403	3	24"	30"	30"	27"	28"	13.54	41
GSW1604	4	16"	40"	40"	35"	23"	18.05	47
GSW2404	4	24"	40"	40"	35"	31"	20.83	55
<b>HANDRAILS</b>								
GSW1603A	3	16"	30"	30"	27"	20"	13.54	46
GSW2403-W03	3	24"	30"	66"	27"	28"	32.29	56
GSW1604-W03	4	16"	40"	76"	35"	23"	30.00	58
GSW2404-W03	4	24"	40"	76"	35"	31"	40.00	66
GSW1605	5	16"	50"	86"	42"	23"	34.16	67
GSW2405	5	24"	50"	86"	42"	31"	45.55	79
GSW2406	6	24"	60"	96"	50"	34"	51.11	109
GSW2407	7	24"	70"	106"	57"	34"	56.66	121
GSW2408	8	24"	80"	116"	63"	34"	62.22	151
GSW2409	9	24"	90"	126"	70"	34"	67.77	170
GSW2410	10	24"	100"	136"	77"	34"	73.33	198
GSW2411	11	24"	110"	146"	83"	34"	78.88	214
GSW2412	12	24"	120"	156"	90"	34"	84.44	228
GSW2413	13	24"	130"	166"	97"	39"	92.22	289
GSW2414	14	24"	140"	176"	104"	39"	97.77	298
GSW2415	15	24"	150"	186"	110"	39"	103.33	311

## GSW REPLACEMENT PARTS


MODEL	DESCRIPTION	SIZE
999844A	Step Lock Spring	6'-15'
601054A	2" Rubber Pad	6'-15'
921016	Caster	1'-5'
999928A	Front Crutch Tip	1'-5'
999928B	Back Crutch Tip	1'-5'
921004A	4" Swivel Caster	6'-15'
921007A	4" Rigid Caster w/Stud	6'-15'

\*GSW parts are not interchangeable with SW parts


## OPTIONS & ACCESSORIES




**Extra Deep Top**  
Standard top platform is 10" deep. 16" and 24" wide models can also be manufactured with an extra deep top platform measuring 20" or 30".  
Accessory # W01 (20")  
Accessory # W02 (30")



**Handrail & Guardrail**  
Models 5-step and taller come standard with 30" handrails and 36" guard-rails on back. Also available on 3-4 step models.  
Accessory #W03



**Spring Loaded Casters**  
(option for 1-step model only) 1-step model comes standard with four rubber tipped legs for stability. Also available with spring loaded casters like those used on 2-5 step models.  
Accessory # W04



**Handrail & Outtrigger (accessory)**  
Required when local codes require 3:1 height to base ratio.

**GSW SERIES**  
5 Step (16" Wide Only) **GRCAL05EC-B**  
5-9 Step **GRCAL0509-B**  
10-12 Step **GRCAL1012-B**  
13-15 Step **GRCAL1315-B**

**GSX SERIES**  
3-7 Step  
(16" Wide Only) **GRCAL05EC-O**  
4-9 Step **GRCAL0509-O**  
10-12 Step **GRCAL1012-O**  
13-15 Step **GRCAL1315-O**



GSW2410



GSW2405



GSW1601A



GSW1603A





# HEAVY DUTY STEEL ROLLING WAREHOUSE LADDERS



GSX2400 SERIES (Knocked Down)

ALL SIZES MEET OR EXCEED THE REQUIREMENTS OF ANSI A14.7 AND OSHA 1910.29 STANDARDS WITH A **350 LB.** LOAD RATING

GSX2409 with option #X09 shown



Meets or exceeds requirements of American National Standards Institute ANSI A14.7

MEETS OSHA REQUIREMENTS

Super heavy duty ladders constructed for the most demanding requirements. Large ball bearing casters facilitate easy maneuvering. All models equipped with large swivel caster in front and rigid casters in the rear. Step on bottom step to activate and lock rubber tipped feet in down position. Step on unlocking pedal to unlock.



**Forward Descent**  
50 degree climbing angle meets ANSI requirements for forward descent.




**Tubular Construction**  
Massive 2" x 1" rectangular tubing base designed to reduce abusive damage.




**Wide Steps**  
The 17" top step and large 8-1/2" steps make climbing and working easier.



**Handrail & Guardrail**  
All units come standard with 1-1/16" OD high strength steel tube handrails and guardrails.



**Bottom Landing Step**  
The 10" bottom step gives a larger surface to engage the locking mechanism.



**Accessory: Unique Easy-Turn™ Design (#X09)**  
Louisville's exclusive Easy-Turn™ feature includes five strategically placed casters for easier mobility and maneuverability. The design allows the user to spin the entire platform on a dime.



**Non Marring/Marking Casters**  
Each model is equipped with 4 ball bearing casters. The caster's material will not mark or mar the working surface.

NEW LLG MODEL	STEPS	STEP WIDTH	PLATFORM HEIGHT	OVERALL HEIGHT	OVERALL DEPTH	OVERALL WIDTH	APPROX. CUBE	WEIGHT
GSX2404	4	24"	40"	76"	49"	28"	37.50	113
GSX2405	5	24"	50"	86"	58"	28"	42.70	126
GSX2406	6	24"	60"	96"	66"	34"	51.11	146
GSX2407	7	24"	70"	106"	74"	34"	56.66	159
GSX2408	8	24"	80"	116"	82"	34"	62.22	200
GSX2409	9	24"	90"	126"	91"	34"	67.77	232
GSX2410	10	24"	100"	136"	99"	34"	73.33	248
GSX2411	11	24"	110"	146"	107"	34"	78.88	264
GSX2412	12	24"	120"	156"	116"	34"	84.44	280
GSX2413	13	24"	130"	166"	124"	39"	92.22	356
GSX2414	14	24"	140"	176"	133"	39"	97.77	369
GSX2415	15	24"	150"	186"	141"	39"	103.33	392

# HEAVY DUTY STEEL ROLLING WAREHOUSE LADDERS

GSX1600 SERIES (Knocked Down)

ALL SIZES MEET OR EXCEED THE REQUIREMENTS OF ANSI A14.7 AND OSHA 1910.29 STANDARDS WITH A **350 LB.** LOAD RATING



Meets or exceeds requirements of American National Standards Institute ANSI A14.7

MEETS OSHA REQUIREMENTS

This super heavy duty ladder is constructed for the most demanding requirements, yet it is only 16" wide—the number one choice for narrow spaced industrial applications.



**Forward Descent**  
50 degree climbing angle meets ANSI requirements for forward descent.



**Non Marring/Marking Casters**  
Each model is equipped with 4 ball bearing casters. The caster's material will not mark or mar the working surface.



**Tubular Construction**  
Massive 2" x 1" rectangular tubing base designed to reduce abusive damage.



**Bottom Landing Step**  
The 10" bottom step gives a larger surface to engage the locking mechanism.

## GSX REPLACEMENT PARTS

MODEL	DESCRIPTION	SIZE
999844A	Step Lock Spring	3'-15'
601054A	2" Rubber Pad	3'-15'
921004A	4" Swivel Caster	3'-7'
921007A	4" Rigid Caster w/Stud	3'-7'
921009A	5" Swivel Caster	8'-15'
921008A	5" Rigid Caster w/Stud	8'-15'

\*GSX parts are not interchangeable with SX parts

NEW LLG MODEL	STEPS	STEP WIDTH	PLATFORM HEIGHT	OVERALL HEIGHT	OVERALL DEPTH	OVERALL WIDTH	APPROX. CUBE	WEIGHT
<b>HANDRAILS</b>								
GSX1603	3	16"	30"	66"	41"	23"	27.98	75
GSX1604	4	16"	40"	76"	49"	23"	32.50	91
GSX1605	5	16"	50"	86"	58"	23"	37.01	104
GSX1606	6	16"	60"	96"	66"	27"	41.52	118
GSX1607	7	16"	70"	106"	74"	27"	46.04	132

**300 lbs.**  
TYPE IA  
load capacity\*  
\*includes weight of user plus materials

# SAFEGARD™ NONCONDUCTIVE MOBILE MAINTENANCE PLATFORM



FW SERIES



This nonconductive, Mobile Maintenance Platform is specially designed for working around electricity. Its nonconductive materials and superior construction provide a higher degree of safety on jobs where electrical lines and equipment are present.

- Heavy-Duty, Slip Resistant, Step Assembly.
- Forward-Descent Design.
- Nonconductive Platform Assembly.
- Standard Easy-Turn Design On 7-15 Stepladders
- Reinforced Back Assembly.
- Heavy-Duty Base Assembly.
- Nonconductive Handrails and Guardrail.
- Step-Lock Safety Feature with Handle for Wheel Engagement.
- Safety Yellow Color.



Patent #5,791,434

FW2400 Series	24"x17" Platform	300 lb. Capacity	1-Person				
MODEL	SIZE	HT. TO TOP STEP	MAX. LENGTH	MAX. WIDTH	MAX. HT. W/RAILS	SHIPPING WT. (LBS)	APPROX. CUBES
FW2404	4	3' 2 1/2"	54 1/2"	32 1/2"	6' 8 1/2"	159	18
FW2406	6	4' 9 1/2"	71 1/2"	32 1/2"	8' 3 1/2"	189	21
FW2408	8	6' 4 1/2"	89"	32 1/2"	9' 10 1/2"	258	28
FW2410	10	7' 11 1/2"	106 1/2"	32 1/2"	11' 5 1/2"	404	60
FW2412	12	9' 6 1/2"	123 1/2"	36 1/2"	13' 1/2"	440	71
FW2414	14	11' 1 1/2"	140 1/2"	39 1/2"	14' 7 1/2"	530	83
FW2415	15	11' 11"	148 1/2"	39 1/2"	15' 5"	545	89

**Optional Accessories.** Louisville offers a selection of accessories, including an extra-deep tool tray on the platform. (PK160)

A security chain that lets you know you're near the edge of the platform. (391149)

An optional outrigger is also available for compliance with local code.

- 6-12 step (328000A)
- 13-15 step (328000B)

## STEEL ROLLING WAREHOUSE LADDER INSTRUCTIONS



### DANGER

Metal ladders conduct electricity. Do not use where contact may be made with live electrical circuits. Failure to read and follow instructions on the use of this product could result in serious personal injury or death.

#### Proper Selection

- Steel warehouse ladders are capable of supporting up to 350 lbs. combined weight of user and materials. Ladders are designed for one person only. Do not overload.
- Select ladder of proper size to safely reach desired height.

#### Inspection Before Each Use

- Inspect thoroughly for missing or damaged components. Never use a damaged ladder and never make temporary repairs.
- Inspect thoroughly for loose fasteners. Make sure all working parts are in good working order (lubricate if necessary). Make sure locking device functions properly and all casters operate freely. Replace worn or missing rubber feet and casters.
- Clean ladder of all foreign material (wet paint, mud, snow, grease, oil, etc.).
- Destroy ladder if damaged, worn, or deteriorated in any way.

#### Consider Before Each Use

- Metal ladders conduct electricity. Keep away from electrical circuits.
- Use ladder only as outlined in instructions. Use on firm level surface.
- Handrails are required on 5 step ladders and larger, toeboard on 12 step ladders and larger.
- Do not use if in poor health, if taking drugs or alcoholic beverages, or if physically handicapped.

- Wear slip-resistant shoes. Keep shoes clean. Do not wear shoes with leather soles or high heels.
- Never leave ladder set up and unattended.
- Pay close attention to what you are doing.

#### Proper Set Up And Use

- Assemble ladder following directions on separate instruction sheet.
- Roll ladder into position for access to materials. Keep body centered between handrails. Do not over reach, push, pull, etc. in any way that causes ladder feet or casters to lift off the floor. Climb down to ground and move ladder as needed.
- On models with spring loaded casters, step on bottom step to engage slip-resistant feet.
- Before using a ladder with a locking device, step on bottom step to lock ladder in place.
- Face ladder when climbing up or down, unless approved for forward facing descent. If equipped with handrails, use them while climbing.
- Do not climb on anything other than perforated steel steps.
- To roll ladder again-  
-On models with spring casters, ladder is ready to roll when dismounted.  
-On models with locking device, step on pedal located under bottom step to place ladder in rolling position.

#### Proper Care And Storage

- Never store materials on ladder.
- Never drop or apply an impact load to ladder.
- Ladder can be disassembled for transport and storage.

# SCAF-A-DECK™




## PD SERIES




PD5000 features:



**Nail Lock**  
Heavy duty hook reinforcement plates help withstand abusive loads.



**Edge-Guard**  
Extrusion protects edges of plywood.



**Heavy Duty**  
1/2" exterior grade plywood deck fastened with special rivets. Deck is easily replaced.

### PLYWOOD SCAFFOLD DECK PD5000

#### PLYWOOD SCAF-A-DECK™


MODEL	PLANK LENGTH	WIDTH	RAIL SIZE	CAPACITY (LBS./SQ.FT.)	APPROX. WEIGHT
PD5007	7'	19"	3"	75 lbs.	25.1
PD5008	8'	19"	3"	75 lbs.	28.2
PD5010	10'	19"	3"	75 lbs.	34.5




PD3000 / PD4000 features:



**Connector Hook**  
Thick aluminum connector hooks with capability of locking using a nail to prevent wind updrift. Hooks are offset so that decks can be butted end to end and will accommodate up to 2" diameter piping.



**Wraparound**  
Aluminum channel protects plywood deck edges from abusive damage.




**Reinforcing Web Brace**  
Heavy duty tempered aluminum rungs hydraulically double crimped to side rails for added strength

### PLYWOOD SCAFFOLD DECK PD3000 / PD4000


Patent #5279193

#### PLYWOOD SCAF-A-DECK™


MODEL	PLANK LENGTH	WIDTH	RAIL SIZE	CAPACITY (LBS./SQ.FT.)	APPROX. WEIGHT
PD3007	7'	19"	3"	75 lbs.	27
PD3008	8'	19"	4"	75 lbs.	36
PD3010	10'	19"	4"	75 lbs.	45
PD4007	7'	24"	3"	75 lbs.	34
PD4008	8'	24"	4"	75 lbs.	45
PD4010	10'	24"	4"	50 lbs.	57

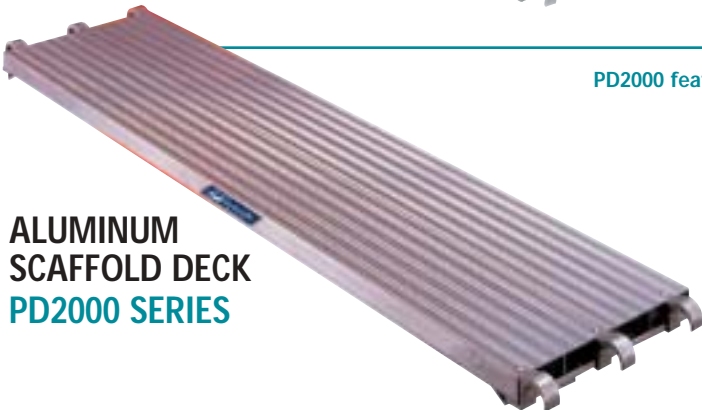

PD2000 features:



**Solid Bolt Construction**  
Makes easy replacement of its interchangeable parts.



**Safety Latch**  
Secures board to scaffold on each end.

### ALUMINUM SCAFFOLD DECK PD2000 SERIES

#### ALUMINUM SCAF-A-DECK™

MODEL	PLANK LENGTH	WIDTH	RAIL SIZE	CAPACITY (LBS./SQ.FT.)	APPROX. WEIGHT
PD2007	7'	19"	2"	75 lbs.	32.9
PD2008	8'	19"	2"	75 lbs.	37.0
PD2010	10'	19"	2"	50 lbs.	49.2

# MEDIUM-DUTY TELESCOPING PLANK

## LP-2920 SERIES




The LadderPro™ medium-duty telescoping plank is available in 9, 13, and 16-foot sizes (fully extended). The plank is manufactured with heavy wall aluminum tubing to prevent the twisting and flexing common to most other planks. The built-in, skid-resistant surface reduces slips. It stores and transports in approximately half of its fully extended length. The telescoping plank has the strength to do the job safely, and the compactness to store easily after the work is done. 250 lb. rated.

#### SPECIFICATIONS

MODEL	DESCRIPTION	STANDARD EXTENSION	WIDTH	APPROX. WT. LBS.	APPROX. CUBES
LP-2920-09A	PLANK 9'	6'0" TO 9'0"	14"	35	1.48
LP-2920-13A	PLANK 13'	8'0" TO 13'0"	14"	46	1.98
LP-2920-16A	PLANK 16'	10'0" TO 16'0"	14"	57	2.47

# SCAFFOLD PLANKS AND STAGE PLATFORMS

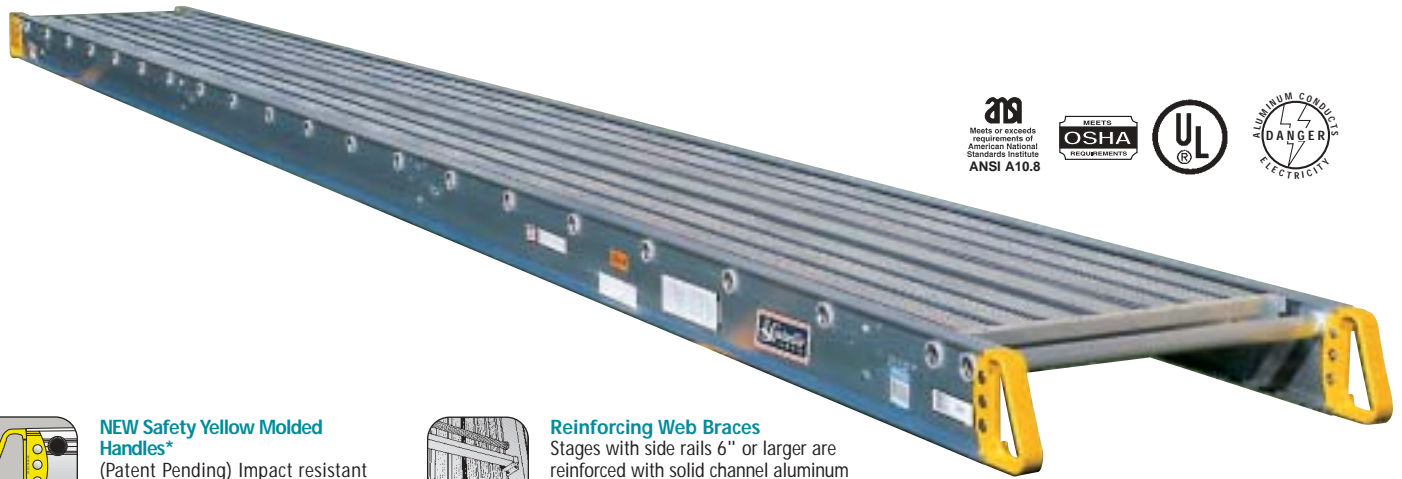

### NEW Safety Yellow Molded Handles\*

(Patent Pending) Impact resistant polypropylene handles designed for easy transport and rugged durability.

\* Available on 4", 5", and 6" stages. Cast rail end caps available on 7" stages.



### Reinforcing Web Braces

Stages with side rails 6" or larger are reinforced with solid channel aluminum web braces. Braces provide greater bearing area and have greater impact strength than rungs and are more easily replaced.




### Easy Grip Rungs

Rungs on each end provide wide, easy to grip handles for pulling or carrying stages.



### Slip Resistant Decking

"Sure-Foot" aluminum decking with raised tread spikes for slip-resistant surface.



### Optional Handrail Systems

Aluminum guardrail, midrail, and toeboard systems available for one to four sides.

## STAGE & PLANK INSTRUCTIONS



### DANGER

• Metal conducts electricity; do not use where contact may be made with live electrical circuits. Failure to read and follow instructions on the use of this product could result in serious personal injury.

### PROPER SELECTION

- Scaffolds shall be furnished and erected in accordance with appropriate ANSI standards.
- Select plank of proper duty rating to support combined weight of user and materials. 250 lb. for 1-man units, 500 lb. for 2-man units, and 750 lb. for 3-man units. Do not overload. No more than rated number of men permitted on plank.
- Use proper size plank. Do not use temporary supports or extensions.

### INSPECTION BEFORE EACH USE

- Inspect thoroughly for missing or damaged components and loose fasteners. Damaged or weakened planks shall be immediately removed from service and shall not be used until repairs have been made. Never make temporary repairs.
- Clean plank of all foreign material (*wet paint, mud, snow, grease, oil, etc.*).
- Destroy if exposed to fire or chemicals.

### CONSIDER BEFORE EACH USE

- Metal conducts electricity. Keep away from electrical circuits.
- Use plank only as outlined in instructions.
- Acids and other corrosive substances may severely affect the strength of this product. Consult manufacturer for use in chemical or other corrosive environments.
- Overhead protection must be provided whenever an over-head hazard exists.
- Do not use in high winds or during storm.
- Do not use in poor health, if taking drugs or alcoholic beverages, or if physically handicapped.
- Keep shoes clean. Leather soles should not be worn.
- Never leave scaffold set up and unattended.
- Pay close attention to what you are doing.

### PROPER SET UP AND USE

- Only trained personnel shall erect and use scaffold.
- Set up level on supports providing a minimum of 12" and a maximum of 18" overhang at each end. Always tie off to building.
- Use guardrails, midrails, and toeboards on open ends and sides when plank is:
  - a) 6' or higher for construction applications
  - b) 10' or higher for other applications
- Guardrails shall be a minimum of 36" and a maximum of 42" high and include a midrail. Guardrails shall be supported on 10' maximum intervals and extend the full plank length.
- Use safety screening of 19 ga. U.S. Standard wire 1/2" mesh or equivalent on open sides and ends when over work or walk area.
- Body Belts must be worn and attached to either a separate drop line from structure or static line properly affixed to scaffold.
- Make sure ladder and scaffold are restrained from movement when accessing scaffold.
- Never use the portion which extends beyond the supports.
- Do not allow unstable or loose objects to accumulate on work surface.
- Do not use ladders or other devices on plank to gain additional height.
- This product is not intended for cantilever applications.
- Use only 250, 300 or 375 lb. Duty Rated Ladders when using planks or platforms with ladder jacks. Fabricated planks intended for use with ladder jacks shall not be less than 12 inches wide.


### PROPER CARE AND STORAGE

- Hang on racks designed to support planks.
- Do not store materials on plank.
- Never drop or apply an impact load to plank. Securely support planks in transit.

FOR ADDITIONAL INFORMATION SEE ANSI A10.8

# 1-MAN DECORATOR PLANK

## 250 LB. WORKING LOAD P1 SERIES

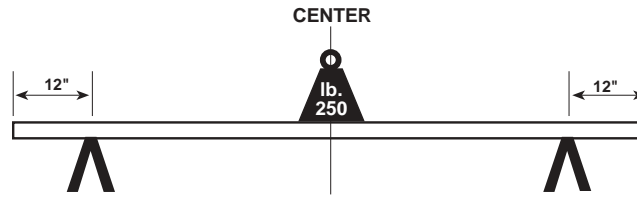


SIZE	SIDE RAIL DEPTH	12" WIDE MODEL	APPROX. WEIGHT	14" WIDE MODEL	APPROX. WEIGHT	20" WIDE MODEL	APPROX. WEIGHT
8'	4"	P11208	21	P11408	22	P12008	25
16'	4"	P11216	47	P11416	50	P12016	57
20'	5"	P11220	63	P11420	67	P12020	77
24'	5"	P11224	76	P11424	80	P12024	92

\*Full Length Decking

# 2-MAN SCAFFOLD PLANK & STAGE


## 500 LB. WORKING LOAD P2 SERIES

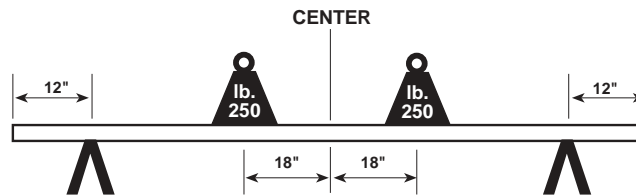

SIDE RAIL SIZE	SIDE RAIL DEPTH	12" WIDE MODEL	APPROX. WEIGHT	14" WIDE MODEL	APPROX. WEIGHT	20" WIDE MODEL	APPROX. WEIGHT	24" WIDE MODEL	APPROX. WEIGHT	28" WIDE MODEL	APPROX. WEIGHT
5'	4"	-	-	-	-	-	-	-	-	P22805	26
6'	4"	-	-	-	-	-	-	-	-	P22806	31
12'	4"	P21212	37	P21412	39	P22012	45	P22412	49	P22812	54
14'	5"	-	-	-	-	-	-	-	-	P22814	68
16'	5"	P21216	52	P21416	55	P22016	65	P22416	71	P22816	78
20'	6"	P21220	81	P21420	85	P22020	97	P22420	103	P22820	114
24'	6"	P21224	96	P21424	101	P22024	114	P22424	122	P22824	135
28'	6"	P21228	123	P21428	129	P22028	145	P22428	155	P22828	170
30'	6"	-	-	-	-	-	-	-	-	P22830	180
32'	6"	P21232	141	P21432	147	P22032	165	P22432	177	P22832	192


# 3-MAN STAGE PLATFORM

## 750 LB. WORKING LOAD P3 SERIES

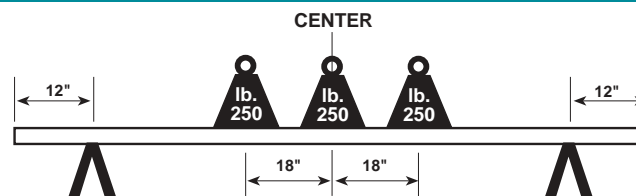


SIZE	SIDE RAIL DEPTH	20" WIDE MODEL	APPROX. WEIGHT	24" WIDE MODEL	APPROX. WEIGHT	28" WIDE MODEL	APPROX. WEIGHT
16'	6"	P32016	86	P32416	90	P32816	100
20'	6"	P32020	105	P32420	111	P32820	121
24'	6"	P32024	125	P32424	133	P32824	145
28'	7"	P32028	179	P32428	188	P32828	206
32'	7"	-	-	-	-	P32832	262
40'	7"	-	-	-	-	P32840	367

# GUARDRAIL SYSTEMS FOR PLANKS AND STAGES



**PT01 SERIES**  
Guardrail, Midrail, Toeboard  
Kits Complete 1 Side



**PT02 SERIES**  
Guardrail, Midrail, Toeboard  
Kits Complete 2 Sides


Meets or exceeds requirements of American National Standards Institute  
**ANSI A10.8**

MEETS  
**OSHA**  
REQUIREMENTS




SIDE RAIL Less than 6" Deep*			SIDE RAIL 6" Deep & Larger		SIDE RAIL Less than 6" Deep*			SIDE RAIL 6" Deep & Larger	
Size	Model	Weight	Model	Weight	Size	Model	Weight	Model	Weight
8'	PT0108-001	28	-	-	8'	PT0208-001	51	-	-
12'	PT0112-001	43	-	-	12'	PT0212-001	77	-	-
16'	PT0116-001	52	PT0116	41	16'	PT0216-001	91	PT0216	82
20'	PT0120-001	64	PT0120	52	20'	PT0220-001	117	PT0220	105
24'	PT0124-001	72	PT0124	60	24'	PT0224-001	132	PT0224	120
28'	-	-	PT0128	71	28'	-	-	PT0228	142
30'	-	-	PT0130	77	30'	-	-	PT0230	153
32'	-	-	PT0132	80	32'	-	-	PT0232	167
40'	-	-	PT0140	98	40'	-	-	PT0240	197

\*Stages with side rails under 6" require the addition of web braces when mounting guardrail components. These kits include necessary braces.



**PG01 Series**  
Guardrail, Midrail Kits  
Complete 1 Side

Note: OSHA requires toeboards in certain applications. Check your local regulations.



**PG02 Series**  
Guardrail, Midrail Kits  
Complete 2 Sides

Note: OSHA requires toeboards in certain applications. Check your local regulations.

ONE SIDE			ONE SIDE		TWO SIDES			TWO SIDES	
Size	Model	Weight	Model	Weight	Size	Model	Weight	Model	Weight
8'	PG0108-001	22	-	-	8'	PG0208-001	39	-	-
12'	PG0112-001	34	-	-	12'	PG0212-001	59	-	-
16'	PG0116-001	38	PG0116	29	16'	PG0216-001	68	PG0216	82
20'	PG0120-001	50	PG0120	38	20'	PG0220-001	90	PG0220	105
24'	PG0124-001	54	PG0124	42	24'	PG0224-001	97	PG0224	120
28'	-	-	PG0128	51	28'	-	-	PG0228	142
30'	-	-	PG0130	53	30'	-	-	PG0230	150
32'	-	-	PG0132	55	32'	-	-	PG0232	157
40'	-	-	PG0140	70	40'	-	-	PG0240	194

\*Stages with side rails under 6" require the addition of web braces when mounting guardrail components. These kits include necessary braces.




## END RAIL KITS (Complete 2 ends)


Kits contain: Guardrail, Midrail, Toeboard, Hardware for two ends of stage

12" WIDE		14" WIDE		20" WIDE		24" WIDE		28" WIDE	
Model	Wt.	Model	Wt.	Model	Wt.	Model	Wt.	Model	Wt.
PA1062A	6	PA1062B	6	PA1062C	12	PA1062D	12	PA1062E	12

## REPLACEMENT PARTS




Guardrail/ Midrail Tubing	Model	Approx. Wt.
Aluminum Tubing	specify length	0.6/Ft.
Handrail/Midrail U Bolts & Hdwr.	PR998000A	0.5 ea.
Toeboard U Bolts & Hdwr.	PR998000B	0.5 ea.



Rail End Caps	Model	Approx. Wt.
Caps for 6-1/2" Rail	064225	0.7 ea.
Caps for 7" Rail	064226	0.8 ea.




Guardrail/ Midrail Tubing	Model	Approx. Wt.
2 Post Kit	PA1061A	8
3 Post Kit	PA1061B	12



Rail End Caps	Model	Approx. Wt.
Caps for 4" Rail	PK200A	0.5 ea
Caps for 5" Rail	PK200B	0.5 ea
Caps for 6" Rail	PK200C	0.5 ea.

Includes socket posts, U bolts & hardware

(2 end caps and hardware per kit)



Handrail Socket with Hardware	Model	Approx. Wt.
3" Handrail socket w/hardware	PR098004C	1

## TOEBOARD MATERIAL

Specify length	0.7/Ft.
----------------	---------

# REPLACEMENT PARTS

## FIELD MOUNT REPLACEMENT PARTS


Replacement parts are for use with Louisville Ladder products. Do not substitute.



### Runglock Replacement Kit (Pairs only) (Now incorporates QuickLatch®)\*

MODEL	MODEL SIZE	PART NO.
AE0600	ALL	PK100D
AE1200	16'-32'	PK100D
AE1200HD	16'-40'	PK100D
AE1200	44'-48'	PK100C
AE1600	44'-48'	PK100A
AE1700	ALL	PK100C
AE2200	ALL	PK100D
AE3200	ALL	PK100D
AE4200	ALL	PK100D
AE2800	ALL	PK100F
AE1660	ALL	PK100M
FE1600	ALL	PK100A
FE4600HD	ALL	PK100A
FE7600	ALL	PK100A
FE0600	ALL	PK100C
FE3200	ALL	PK100C
FE4200HD	ALL	PK100C
FE7200	ALL	PK100C


\*QuickLatch® Rung-Lock Latch is a convenience item which offers an easy way to secure the base and fly sections during setup. Excluding PK100H and PK100M.



### Stepladder Spreader Braces

MODEL	MODEL SIZE	PART NO.
AM1000	3'	PK220N
AM1000	4'-6'	PK220P
AM1100HD	3'	PK220N
AM1100HD	4'-6'	PK220P
AM1100HD	7'-8'	PK220R
AM1100HD	10'-16'	PK220S
AP1000	8'-12'	PK220C
AP1000	12'	PK220D
AP1000	14'	PK220E
AP1000	16'	PK220F
AP1100HD	8'-12'	PK220C
AP5000	8'-12'	PK220C
AS1100HD	2'-4'	PK220L
AS1100HD	5'-6'	PK220G
AS1100HD	7'-10'	PK220H
AS1100HD	8'-12'	PK220C
AS1000	3'-6'	PK220G
AS1000	7'-10'	PK220H
AS1000	10'	PK220J
AS1000	14'	PK220D
AS1000	16'	PK220E
AS1000	18'	PK220F
AS1000	20'	PK220K
AS1000	8'-12'	PK220C
AS3000	2'	PK220B

MODEL	MODEL SIZE	PART NO.
AS3000	3'-6'	PK220M
AS3000	8'-10'	PK220A
AY8000	2'-4'	PK220L
FM1400HD	3'	PK220N
FM1400HD	4'-6'	PK220P
FM1400HD	7'-8'	PK220R
FM1400HD	10'-16'	PK220S
FM1500	3'	PK220N
FM1500	4'-6'	PK220P
FM1500	7'-8'	PK220R
FM1500	10'-16'	PK220S
FS1300HD	4'-7'	PK220T
FS1300HD	8'-10'	PK220U
FS1300HD	12'	PK220V
FS1400HD	4'-7'	PK220T
FS1400HD	8'-10'	PK220U
FS1400HD	12'	PK220V
FS1500	2'	PK220B
FS1500	3'-4'	PK220L
FS1500	5'-7'	PK220T
FS1500	8'-10'	PK220U
FS1500	12'	PK220V
FS2000	8'-10'	PK220A
FY8000	2'-4'	PK220L



### Rope & Pulley Kit Round or "D" Rung

16-40 ft. ladders.  
Part #PK120B (3/8) poly

AE1660  
Part #PK120D



### Swivel Safety Shoe Kits Fiberglass, Aluminum & Wood (pairs only)

MODEL	MODEL SIZE	PART NO.
AE1100	ALL	PK110A
AE1200	ALL	PK110A
AE1200HD	ALL	PK110A
AE1500	ALL	PK110A
AE1600	ALL	PK110A
AE1660	ALL	PK110B
AE2100	ALL	PK110A
AE2200	ALL	PK110A
AE2500	ALL	PK110A
AE2600	ALL	PK110A
AE2800	ALL	PK110A
AE3200	ALL	PK110D

MODEL	MODEL SIZE	PART NO.
AE4100	ALL	PK110D
AE4200	ALL	PK110D
AE5200	ALL	PK110D
FE0600	ALL	PK110D
FE3200	ALL	PK110D
FE4000	ALL	PK110A
FE5200	ALL	PK110D
FE7000	16'-32'	PK110A
FE7000	36'-40'	PK110B



### Stepladder Shoe Kits Fiberglass, Aluminum & Wood sets

MODEL	MODEL SIZE	PART NO.
AH1000	ALL	PK130L
AM1000	ALL	PK130B
AM1000	14'-20'	PK130D
AM1100HD	ALL	PK130B
AP1000	3'-10'	PK130A
AP1000	12'-16'	PK130C
AP1100HD	ALL	PK130A
AP5000	ALL	PK130A
AS1000	ALL	PK130A
AS1000	14'-20'	PK130C
AS1100HD	ALL	PK130A
AS2100	ALL	PK130F
AS3000	3'-10'	PK130F
AS3000	2'	PK130AC
AS4000	ALL	PK130F
AX1000	ALL	PK130B
AY8000	ALL	PK130K


MODEL	MODEL SIZE	PART NO.
FH1000	ALL	PK130L
FM1100HD	ALL	PK130T
FM1400HD	ALL	PK136B
FM1500	ALL	PK136B
FP1100HD	ALL	PK130S
FP1400HD	ALL	PK136A
FS1100HD	ALL	PK130S
FS1400HD	ALL	PK136A
FS1500	2'	PK130E
FS1500	3'-12'	PK136A
FS2000	ALL	PK130E
FS4000	ALL	PK130E
FX1000	ALL	PK130B
FY8000	ALL	PK130K
WS1000M	ALL	PK131A
WS3600M	ALL	PK131C

# LADDER ACCESSORIES


For availability, please contact Customer Service. Please specify ladder size and ladder model. To order factory-mount accessories, add the 3-digit accessory number after the ladder's model number and size. (EXAMPLE: FE3220-E05 20' Fiberglass Extension with Web Pole Grip)

## EXTENSION LADDERS


### FIBERGLASS & ALUMINUM




**Combination Pole Grip & Cable Hook** (Fiberglass only)  
A rigid plated steel "V" shaped pole grip covered with rubber tread, combined with cable hook assembly.  
Accessory #E03




**Rung Insulator**  
Heavy duty plastic rung insulator fits over top rung of straight or extension ladder. Mechanically attached with two fasteners.  
Accessory #E17  
Part #601064A




**Rigid Pole Grip** (Fiberglass only)  
3/16" x 1" plated steel bar formed into a "V" shape and covered with heavy rubber tread makes an ideal pole grip and can be added to ladders already in service.  
Accessory #E04



**Wheel Spurs** (Fiberglass only)  
Wheel spurs are available as an alternative to our standard cast swivel safety shoe.  
Accessory #E30




**Web Pole Grip** (Fiberglass only)  
Made of flexible high strength nylon webbing with a 5" section of corrugated rubber tread. Helps to hold top of ladder against poles, pipes or corners.  
Accessory #E05



**Automatic-Adjusting Leveler**  
(Fiberglass & Aluminum Ladders only)  
Leveler keeps ladder stabilized in perpendicular position on uneven terrain. Adjustable up to a 9" height differential.  
Accessory #E34 (Factory mount)  
Model #091006C (Field mount)




**Ladder Lash** (Fiberglass only)  
Lash for wrapping around objects up to 17" in diameter. Made of 2" dacron webbing with forged steel snaps and a quick adjustment slide with clip.  
Accessory #E11



**Combination Spur and Shoe** (Fiberglass only)  
This accessory allows the use of either a spur or a shoe with thick rubber tread.  
Accessory #E38



**Non-Marring Top Caps** (Fiberglass only)  
Rubber top bumpers designed for channel fiberglass ladders up to 32'. Virtually eliminates marring of metal or plastic surfaces. Can be added to ladders already in service.  
Accessory #E12



**Front-Mounted Pulley** (Fiberglass only)  
Large diameter pulley sheave assembly mounted between slide guides allows fly section to be extended and lowered from front side of ladder.  
Accessory #E55


## STEPLADDERS

### FIBERGLASS & ALUMINUM




**Da Boot™** (Fiberglass only)  
Polypropylene copolymer upper boot. Thick non-marring thermoplastic elastomer rubber tread is bonded and mechanically fastened to the upper boot. For use on fiberglass ladders only.  
Accessory #S34  
\*See PK Kits for sizes

Field Mounted for series FS1400, FS1500, FM1400, FM1500, FP1400, FP1500



**Big Foot Shoe**  
Optional stepladder shoes with extra wide bottoms for use on gratings. Front shoe size 5-1/2" x 2". Back shoe 3-1/4" x 2".  
Accessory #S30

### WOOD



**Steel Angle Feet**  
Heavy duty steel angle feet with thick rubber tread. Easily mounted to ladders already in service with threaded bolt.  
Accessory #S33  
\*See PK Kits for sizes



## LADDER PRO™ ACCESSORIES



**Ladder Stabilizer**  
Fits extension and single ladders with rail up to 4" x 1-3/4". Holds ladder 12 inches from wall and spans 48" to clear most windows. Stabilizers attach with 2 U-bolts and feature replaceable extra heavy duty rubber tips.  
Model #LP-2200-00



**Ladder Jack (Short Body)**  
Short body ladder jacks (1 pair) span 2 extension ladder rungs. Holds stages and planks up to 20" wide, features six pitch adjustments and folds for easy storage. Manufactured for use with Type IAA, IA, and I fiberglass and aluminum extension ladders.  
Model #LP-2100-23



**Adjustable Stabilizer**  
Fits extension and single ladders with rail up to 4" x 1-3/4". Aluminum bracket with vertical adjustments hold ladder from 13" to 25" from wall and spans 48" to clear most windows. Stabilizers attach with 2 U-bolts and feature replaceable extra heavy duty rubber tips.  
Model #LP-2210-00



**Ladder Jack (Long Body)**  
Long body ladder jacks (1 pair) span 3 extension ladder rungs. Holds stages and planks up to 20" wide, features six pitch adjustments and folds for easy storage. Manufactured for use with Type IAA, IA, and I fiberglass and aluminum extension ladders.  
Model #LP-2100-13



**Pro-Guards™**  
Pro-Guards™ fit most fiberglass and aluminum extension and single ladders. Protect your work surface with Pro-Guards™.  
Accessory #LP-5510-00  
Patent #6,499,563 B1



**Ladder Leveler**  
Ideal for using on extension or straight ladders on uneven surfaces. Attaches easily to Type IAA, IA, I, and II fiberglass and aluminum extension or single ladders. Features plated steel construction and a safety guard to protect from accidental release. The ladder leveler has a maximum differential of 15".  
Model #LP-2300-00



**Pail Shelf**  
The Universal pail shelf fits all Louisville, Davidson/Cuprum brand stepladders. Detailed instructions and supplied hardware make installation easy.  
Accessory #S51 (Factory mount)  
Model #LP-2400-00 (Universal)  
Field Mounted for series FS1100HD, FS1400, FS1500, FS2000

# LOGOLOCK™ SYSTEM



CONTACT YOUR  
LOUISVILLE LADDER SALES  
REPRESENTATIVE FOR MORE  
INFORMATION!

## PROMOTE

your customer's name with the LogoLock™ system

## DETER THEFT

by displaying your logo

## CUSTOMIZE

the image of your ladders

## LONG LASTING

image embedded into fiberglass rail


- Each ladder will have one custom logo applied to each side rail (Dimension of logo should be a maximum of 7-1/16" x 2-3/8").
- One-time set-up fee for each logo.
- Artwork must be provided in either jpg or tif format with a minimum 300 dpi resolution.

**300** lbs.  
TYPE IA  
load capacity\*  
\*Includes weight of user plus materials

# ALUMINUM MULTI-PURPOSE LADDER



### FOUR DIFFERENT LADDER TYPES IN ONE.



**Hinge**  
Reliable, quick-activating snap-lock hinges permit easy, one-man set-up. Provides stability and versatility for the most demanding jobs.



**Heavy Duty Locking Pins**  
Easy to use heavy duty locking pins provide secure assembly of ladder sections regardless of configuration.



Meets or exceeds requirements of American National Standards Institute, ANSI A14.2

MODEL	FOLDED HEIGHT	EXTENSION RANGE	WORKING HEIGHT	STEPLADDER RANGE	SCAFFOLD HEIGHT	APPROX. WEIGHT
	3' 5"	6' 5" to 10' 11"		3' 5" to 5' 5"	up to 3' 5"	

# C.L.I.M.B. ACADEMY® SAFETY TRAINING PROGRAM



## THE C.L.I.M.B. ACADEMY® SAFETY TRAINING PROGRAM FROM LOUISVILLE LADDER, INC.

Louisville's NEW C.L.I.M.B. Academy® teaches fundamental principles when using:

- Step and Extension Ladders
- Rolling Warehouse Ladders
- Rolling Tower Scaffolding

The C.L.I.M.B. Academy® includes a new video, shot on location at *Churchill Downs*, *The Louisville Slugger Museum*, *The Belle Of Louisville Riverboat*, and *Louisville Ladder Inc. Headquarters, Louisville, KY*. **C.L.I.M.B.** teaches you to **CHOOSE** the right equipment, **LOOK** for damage or missing parts, **INSURE** a safe set-up, and **MOVE** safely always using 3 points of contact. We encourage everyone to **BE** a climbing equipment safety expert, not a statistic!



PRODUCT NUMBER	DESCRIPTION
VDO-KIT 3	C.L.I.M.B. ACADEMY® SAFETY TRAINING PROGRAM includes: <ul style="list-style-type: none"> <li>■ Combined Facilitator &amp; Student Handbook</li> <li>■ VHS Video</li> <li>■ DVD</li> <li>■ Certificate</li> <li>■ Spanish and Subtitles</li> </ul>
951025	REPLACEMENT HANDBOOKS AND DIPLOMA KITS

## MERCHANDISER SRA7 LADDER RACK

LOUISVILLE LADDER'S SRA7 LADDER RACK MERCHANDISER DESIGNED SPECIFICALLY TO INCREASE LADDER SALES.

- New display puts merchandiser at eye level
- New accessory tray
- Holds 6 ladders
- Durable blue powder coated finish

*(Ladders and accessories not included)*



## UNITED STATES LOCATIONS

### ■ COMPANY HEADQUARTERS

7765 National Turnpike - Unit 190  
Louisville, KY 40214  
Tel: (502) 636-2811  
1-(800)-666-2811 U.S. & CANADA  
Fax: 1-(800)-274-4566

### ★ SMYRNA REGIONAL WAREHOUSE

700 Swan Drive  
Smyrna, TN 37167  
Tel: (615) 459-6094  
Tel: (800)-999-7297  
Fax: (615) 355-4711

### ★ ATLANTA REGIONAL WAREHOUSE

2689A Mountain Industrial Blvd.  
Tucker, GA 30084  
Tel: (770) 491-1515  
Fax: (770) 723-7681

### ★ CHICAGO REGIONAL WAREHOUSE

2101 Dralle Rd  
University Park, IL 60466  
Tel: (800) 666-2841  
Tel: (800)-274-4566  
Fax: (708) 235-1348

### ★ DALLAS REGIONAL WAREHOUSE

9001 Sterling Street - Suite 100  
Irving, TX 75063  
Tel: (972) 871-2296  
1-(800)-625-5742  
Fax: (972) 870-9002

### ★ DENVER REGIONAL WAREHOUSE

2570 W. Barberrry Place  
Dever, CO 80204  
Tel: (303) 892-9229  
Tel: (800)-666-2811  
Fax: (800)-274-4566

### ★ HOUSTON REGIONAL WAREHOUSE

4845 Homestead Rd.-Suite 504  
Houston, TX 77028  
Tel: (713) 673-4000  
1-(800) 666-2811  
Fax: (713) 673-4242

### ★ KANSAS CITY REGIONAL WAREHOUSE

5321 Municipal Avenue  
Kansas City, MO 64120  
Tel: (816) 421-2450  
1-(800)-625-5725  
Fax: (816) 421-3293

### ★ LOS ANGELES REGIONAL WAREHOUSE

12448 Bell Ranch Drive  
Santa Fe Springs, CA 90670  
Tel: (562) 903-9447  
Tel: (800)-625-1408  
Fax: (562) 903-9449

### ★ PHILADELPHIA REGIONAL WAREHOUSE

279 Canal Road  
Fairless Hills, PA 19030  
Tel: (215) 736-1151 or  
1-(800)-447-4785  
Fax: 1-(800)-283-2388

### ★ SAN FRANCISCO REGIONAL WAREHOUSE

30518 Huntwood Ave.  
Hayward, CA 94544  
Tel: (510) 489-1592  
Tel: (800)-625-6177  
Fax: (510) 489-1594

## CANADIAN LOCATIONS

### ★ SPARTAN AGENCIES LTD SALES OFFICE & WAREHOUSE

9703-199 A Street  
Langley, British Columbia V1M 2X7  
Tel: (604) 888-2241  
Fax: (604) 88-2126

### ★ SPARTAN AGENCIES LTD SALES OFFICE

121 Hollands Drive  
Ardrossan, Alberta T0B 0E0  
Tel: (403) 922-5819  
Fax: (403) 922-6312

### ★ SPARTAN AGENCIES LTD SALES OFFICE

39 Point West Drive  
Winnepeg, Manitoba R3T 5G8  
Tel: (204) 269-1855  
Fax: (204) 269-1855

### ★ LEONARD SALES SALES OFFICE & WAREHOUSE

385 Watline Drive  
Mississauga, Ontario L4Z 1P3  
Tel: (905) 712-4313  
Fax: (905) 712-4314

### ★ CONTACT DELAGE SALES OFFICE & WAREHOUSE

135 J. A. Bombardier, Ste 90  
Boucherville, QC J4B 8P1  
Tel: (450) 449-9444  
Fax: (450) 449-6070

### ★ BROCKWAY ENTERPRISES SALES OFFICE

7 Howard Ct.  
Quispamsis, New Brunswick E2E 4J6  
Tel: (506) 849-6000  
Fax: (506) 847-5329

### ★ BROCKWAY ENTERPRISES SALES OFFICE

51 Cobequid Road  
Lower Sackville, Nova Scotia B4C 2N1  
Tel: (902) 864-8236  
Fax: (902) 865-8252

### ★ BROCKWAY ENTERPRISES SALES OFFICE

32 Nedler Dr.  
Mount Pearl, Newfoundland A1N 4L1  
Tel: (709) 368-6871  
Fax: (709) 368-6872



Louisville Ladder, Inc.  
7765 National Turnpike - Unit 190  
Louisville, KY 40214  
Telephone: (502) 636-2811  
1-(800)-666-2811 U.S. & CANADA  
Fax: 1-(800)-274-4566

Visit our website at:  
[www.louisvilleadder.com](http://www.louisvilleadder.com)

Distributed by: